

MASTER TL5 High Output Secura

MASTER TL5 HO Secura 80W/840 UNP/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope and protective coating around the lamp to prevent contamination resulting from breakage

Product data

- General Information

Cap-Base	G5 [G5]
Life To 50% Failures	30000 h
Preheat (Nom)	
System Description	High Output (HO)
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	97 %
LSF Preheat 20000 h Rated	84 %

- Light Technical

Colour Code	840 [CCT of 4000K (841)]
Luminous Flux (Nom)	6550 lm
Luminous Flux (Rated) (Nom)	6550 lm
Colour Designation	Cool White (CW)
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	88 lm/W
Chromaticity Coordinate X (Nom)	380
Chromaticity Coordinate Y (Nom)	380
Colour Temperature, horizontal (Nom)	4100 K
Luminous Efficacy (rated) (Nom)	82 lm/W
Colour Rendering Index horiz (Max)	85
Colour Rendering Index horiz (Min)	80
Colour Rendering Index horiz (Nom)	82
Depreciation 2000 hrs	96 %
LLMF 4000 h Rated	95 %
Depreciation 5000 hrs	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

- Operating and Electrical

Power (Rated) (Nom)	79.8 W
Lamp Current (Nom)	0.530 A

- Temperature

Design Temperature (Nom)	35 °C

- Controls and Dimming

Dimmable	Yes

- Mechanical and Housing

Cap-Base Information	Green Plate

PHILIPS

MASTER TL5 High Output Secura

- Approval and Application

Energy Efficiency Label	A
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	88 kWh

- Product Data


Full product code	871150095235655

Order product name	MASTER TL5 HO Secura 80W/840 UNP/40
EAN/UPC - Product	8711500952356
Order code	95235655
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927929684018
Net Weight (Piece)	132.000 g
ILCOS Code	FDH-80/40/1B-L/P-G5-16/1450

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- It's strongly recommended to replace Secura lamps before or at the moment the specified lamp life (50% failures @ 3 hrs switching cycle) is reached.


Dimensional drawing

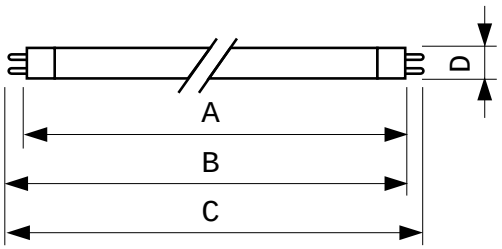

TL5 HO Secura 80W/840


Product	D	A	B	B	C
MASTER TL5 HO Secura 80W/840 UNP/40	17 mm	1449.0 mm	1456.1 mm	1453.7 mm	1463.2 mm


G5, T5



MASTER TL5 High Output Secura

Photometric data

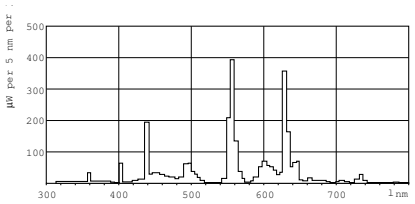

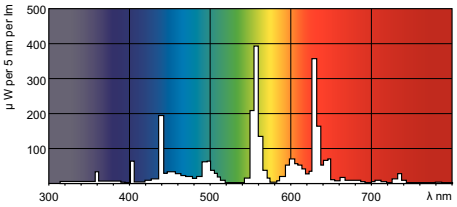

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change