# Hi-Spot ES50 Home

*ES50 HM 240V 50W 50° GU10 SV1*

**0021261**



### Cechy gamy

- Unique, patented, spiral faceted aluminised reflector
- Clear front lens for crisp sparkling light
- Integral safety fuse
- Ceramic base
- For use in mains voltage GU10 downlights, spotlights and luminaires
- Transformer free operation
- Average rated life 2500hrs

UV STOP

## PRZEGLĄD PRODUKTÓW

| | |
|---|---|
| **Ordering number** | 0021261 |
| **Light colour** | 827 Homelight |
| **Technology** | Halogen |
| **Energy class** | D |
| **Average life (Rated) (h)** | 3000 |
| **Lamp finish** | Aluminium |
| **Lamp shape** | Reflector |
| **Dimmable** | Yes |
| **Cap/Base** | GU10 |
| **Type** | PAR16 (GU10) |
| **EAN code** | 5410288212616 |
| **CRI (Ra)** | 100 |
| **Beam angle(°)** | 50 |
| **Colour temperature (K)** | 2700 |
| **Useful luminous flux (Rated) (lm)** | 300 |
| **Watt (Nominal) (W)** | 50 |
| **Voltage (V)** | 240 |

# Hi-Spot ES50 Home

*ES50 HM 240V 50W 50° GU10 SV1*

**0021261**

## TABELA DANYCH

Dane główne

| | |
|---|---|
| **Ordering number** | 0021261 |
| **Technology** | Halogen |
| **Average life (Nominal) (h)** | 3000 |
| **Average life (Rated) (h)** | 3000 |
| **Energy saving lamp** | No |
| **Energy class** | D |
| **Lamp shape** | Reflector |
| **Lamp finish** | Aluminium |
| **Dimmable** | Yes |
| **Cap/Base** | GU10 |
| **Type** | PAR16 (GU10) |
| **EAN code** | 5410288212616 |
| **Long description** | Unique, patented, spiral faceted aluminised reflector. Clear front lens for crisp sparkling light. Integral safety fuse. Ceramic base. For use in mains voltage GU10 downlights, spotlights and luminaires. Transformer free operation. Average rated life 2500hrs |
| **Product name** | ES50 HM 240V 50W 50° GU10 SV1 |
| **Lamp mercury content (mg)** | 0 |
| **Starting time (max) (s)** | 0 |
| **Warm-up time to 60% of full light (max) (s)** | Instant Full Light |
| **Control gear required** | No |
| **Fixture rating** | Open |
| **IEC Reference** | IEC 60357 |
| **IEC Reference 2** | IEC 60432-3 |
| **IEC Reference 3** | IEC 60630 |
| **Intended purpose** | General lighting |
| **No. of switching cycles before premature failure (min)** | > 12000 |
| **Special purpose lamp** | No |
| **Transformer required** | no |
| **Sales pack quantity** | 10 |

# Hi-Spot ES50 Home

*ES50 HM 240V 50W 50° GU10 SV1*

**0021261**

## Dane optyczne

| | |
|---|---|
| **Light colour** | 827 Homelight |
| **CRI (Ra)** | 100 |
| **Beam angle (Rated) (°)** | 50 |
| **Suitable for accent lighting** | Yes |
| **Beam angle(°)** | 50 |
| **Colour temperature (K)** | 2700 |
| **Useful luminous flux (Rated) (lm)** | 300 |
| **Lumen maintenance at end of nominal life (%)** | 80 |
| **Luminous flux (Nominal) (lm)** | 300 |
| **Peak intensity (cd)** | 500 |

## Dane elektryczne

| | |
|---|---|
| **kWh per 1000 hours burning time** | 50 |
| **Watt (Rated) (W)** | 50 |
| **Watt (Nominal) (W)** | 50 |
| **Voltage (V)** | 240 |
| **Lamp power factor** | 1 |

## Dane fizyczne


| | |
|---|---|
| **Weight (kg)** | 0.05 |
| **Lamp Length (mm) - C/L** | 55 |
| **Max. Lamp Diameter (mm) - D** | 50 |
| **Lamp dimension equal to filament lamp equivalent** | Yes |
| **Designed for optimum use in non standard conditions** | No |
| **Single packaging type** | Box/Sleeve |
| **Single package dimensions (L x W x H) (cm)** | 6.20 x 4.80 x 4.80 |
| **Outer package dimensions (L x W x H) (cm)** | 50.00 x 27.00 x 14.00 |

# Hi-Spot ES50 Home


*ES50 HM 240V 50W 50° GU10 SV1*


**0021261**

## FOTOMETRIA




## RYSUNEK TECHNICZNY

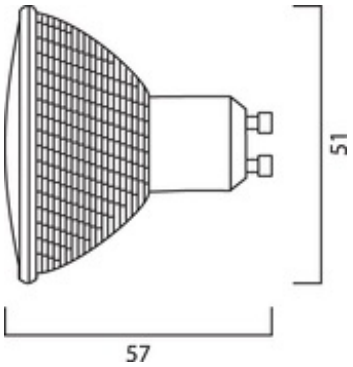

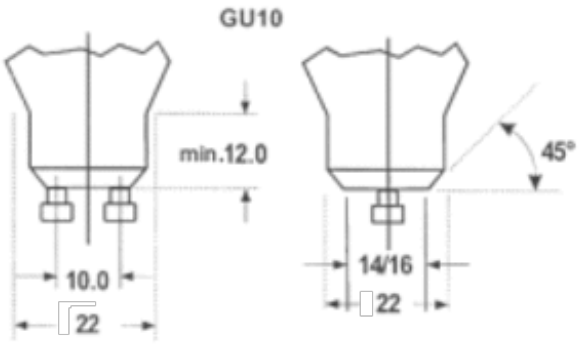
## ETYKIETA ENERGETYCZNA

