Capsule ECO - Low Pressure

CAPS ECO 12V 28W GY6.35 SV1

0021320



Cechy gamy

- Xenon technology
- Compact size for optimum luminaire design
- Dimmable using a suitable dimmer for operation with a transformer
- Constant light output throughout lamp life
- Suitable for use in open luminaires following Luminaire Standard EN 60598-1
- UV protected
- Suitable for interior display, shop windows, restaurants, etc
- Less CO2 emissions - ECO Friendly
- Less heat generation than standard halogen capsules- more design freedom for luminaire manufacturers
- Excellent colour rendering (CRI=100)
- Average rated life 2000hrs - 20% energy saving with same light output compared to standard capsules

UV STOP

PRZEGLĄD PRODUKTÓW

Ordering number	0021320
Light colour	829 Warm white
Technology	Halogen
Energy class	C
Average life (Rated) (h)	2000
Lamp finish	clear
Lamp shape	Capsule
Dimmable	Yes
Cap/Base	GY 6.35
Type	Capsule
EAN code	5410288213200
CRI (Ra)	100
Beam angle(°)	na
Colour temperature (K)	2900
Luminous flux (Rated) (lm)	500
Watt (Nominal) (W)	28
Voltage (V)	12

Capsule ECO - Low Pressure

CAPS ECO 12V 28W GY6.35 SV1

0021320

TABELA DANYCH

Dane główne

Ordering number	0021320
Technology	Halogen
Average life (Rated) (h)	2000
Average life (Nominal) (h)	2000
Energy saving lamp	No
Energy class	C
Lamp finish	clear
Lamp shape	Capsule
Dimmable	Yes
Cap/Base	GY 6.35
Type	Capsule
EAN code	5410288213200
Long description	Xenon technology. Compact size for optimum luminaire design. Dimmable using a suitable dimmer for operation with a transformer. Constant light output throughout lamp life. Suitable for use in open luminaires following Luminaire Standard EN 60598-1. UV protected. Suitable for interior display, shop windows, restaurants, etc. Less CO2 emissions - ECO Friendly. Less heat generation than standard halogen capsules- more design freedom for luminaire manufacturers. Excellent colour rendering (CRI=100). Average rated life 2000hrs - 20% energy saving with same light output compared to standard capsules
Product name	CAPS ECO 12V 28W GY6.35 SV1
Lamp mercury content (mg)	0
Starting time (max) (s)	0.01
Warm-up time to 60% of full light (max) (s)	Instant full light
Control gear required	No
Fixture rating	Open
IEC Reference	IEC 60357
IEC Reference 2	IEC 60432-3
Intended purpose	General lighting
No. of switching cycles before premature failure (min)	> 8000
Special purpose lamp	No
Transformer required	Yes
Sales pack quantity	10
Optimal operating condition (°C)	25

Capsule ECO - Low Pressure

CAPS ECO 12V 28W GY6.35 SV1

0021320

Dane optyczne

Light colour	829 Warm white
CRI (Ra)	100
Suitable for accent lighting	No
Beam angle(°)	na
Colour temperature (K)	2900
Luminous flux (Rated) (lm)	500
Lumen maintenance at end of nominal life (%)	80
Luminous flux (Nominal) (lm)	500

Dane elektryczne

kWh per 1000 hours burning time	30
Watt (Rated) (W)	28
Watt (Nominal) (W)	28
Voltage (V)	12
Lamp power factor	1

Dane fizyczne


Weight (kg)	0.00
Lamp Length (mm) - C/L	44
Max. Lamp Diameter (mm) - D	12
Single packaging type	Blister
Single package dimensions (L x W x H) (cm)	6.70 x 2.50 x 2.50
Outer package dimensions (L x W x H) (cm)	27.00 x 13.50 x 13.50


Capsule ECO - Low Pressure

CAPS ECO 12V 28W GY6.35 SV1

0021320

RYSUNEK TECHNICZNY

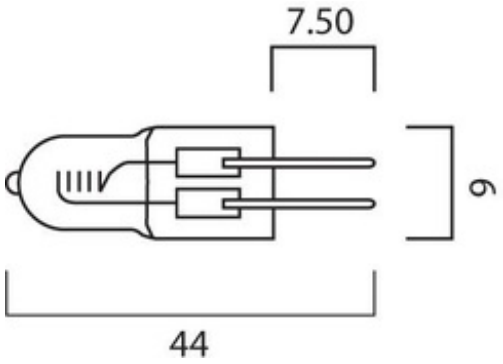

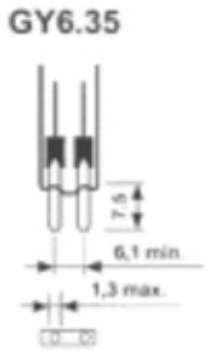

ETYKIETA ENERGETYCZNA

