

MASTER PL-T TOP 4 Pin

MASTER PL-T TOP 32W/840/4P 1CT/5X10BOX

Energy saving compact fluorescent lampCompact long-arc low-pressure mercury discharge lampEnvelope consists of 6 parallel narrow fluorescent tubesAmalgam controlled operation

Benefits

• General Information

Cap base	GX24Q-3 [GX24q-3]
Life to 50% failures preheat (nom.)	13000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	97 %
LSF Preheat 8000 h Rated	90 %

• Light Technical

Lamp Luminous Flux 25°C EL (Nom)	2400 lm
Lamp Luminous Flux (Nom)	2400 lm
Colour Designation	Cool White (CW)
Chromaticity coordinate X (nom.)	380
Chromaticity coordinate Y (nom.)	379
Colour Temperature, horizontal (Nom)	4100 K
Lamp Luminous Efficacy EM (Min)	75 lm/W
Colour Rendering Index,horiz (Nom)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	88 %
LLMF 6000 h Rated	85 %
LLMF 8000 h Rated	84 %
LLMF 12000 h Rated	81 %

• Operating and Electrical

Power (Rated) (Nom)	32.0 W
Lamp current (nom.)	0.320 A

• Temperature

Design temperature (nom.)	28 °C

• Controls and Dimming

Dimmable	yes

• Mechanical and Housing

Cap base information	4P

• Approval and Application

Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	1.4 mg
Energy Consumption kWh/1000 h	36 kWh

• Product Data

Full product code	871150056026170
Order product name	MASTER PL-T TOP 32W/840/4P 1CT/5X10BOX
EAN/UPC – product	8711500560261
Order code	927911984069
Numerator – quantity per pack	1

PHILIPS


MASTER PL-T TOP 4 Pin

Numerator – packs per outer box	50
Material no. (12NC)	927911984069
Net weight (piece)	70.000 g
ILCOS Code	FSMH-32/40/1B-L/P-GX24q=3


Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

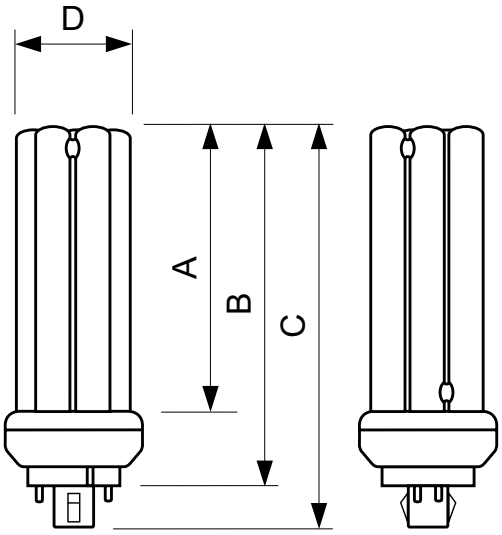


GX24q-3, 4P



PL-T TOP 32W/840/4P A

Product	D	A	B	C
MASTER PL-T TOP 32W/840/4P 1CT/5X10BOX	41 mm	98.7 mm	123.0 mm	138.7 mm

Photometric data

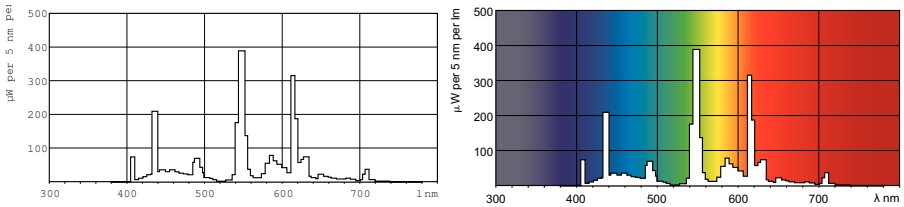

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change