

# MASTER PL-T 2 Pin

## MASTER PL-T 26W/830/2P 1CT/5X10CC

Energy saving compact fluorescent lampCompact long-arc low-pressure mercury discharge lampEnvelope consists of 6 parallel narrow fluorescent tubes

## Product data

### • General Information

| | |
|---|---|
| Cap-Base | GX24D-3 [ GX24d-3] |
| Life To 10% Failures (Nom) | 6500 h |
| Life To 50% Failures (Nom) | 10000 h |
| LSF 2000 h Rated | 99 % |
| LSF 4000 h Rated | 98 % |
| LSF 6000 h Rated | 92 % |
| LSF 8000 h Rated | 78 % |

### • Light Technical

| | |
|---|---|
| Colour Code | 830 [ CCT of 3000K] |
| Luminous Flux (Nom) | 1800 lm |
| Luminous Flux (Rated) (Nom) | 1725 lm |
| Colour Designation | Warm White (WW) |
| Chromaticity Coordinate X (Nom) | 436 |
| Chromaticity Coordinate Y (Nom) | 401 |
| Colour Temperature, horizontal (Nom) | 3000 K |
| Luminous Efficacy (rated) (Min) | 66 lm/W |
| Colour Rendering Index horiz (Nom) | 82 |
| Depreciation 2000 hrs | 92 % |
| LLMF 4000 h Rated | 87 % |
| Depreciation 5000 hrs | 84 % |
| LLMF 8000 h Rated | 81 % |

### • Operating and Electrical

| | |
|---|---|
| Power (Rated) (Nom) | 26.0 W |
| Lamp Current (Nom) | 0.335 A |

### • Temperature

| | |
|---|---|
| Design Temperature (Nom) | 28 °C |

### • Controls and Dimming

| | |
|---|---|
| Dimmable | No |

### • Mechanical and Housing

| | |
|---|---|
| Cap-Base Information | 2P |

### • Approval and Application

| | |
|---|---|
| Energy Efficiency Label | B |
| Mercury (Hg) Content (Nom) | 1.4 mg |
| Energy Consumption kWh/1000 h | 32 kWh |

### • Product Data

| | |
|---|---|
| Full product code | 871150061102470 |
| Order product name | MASTER PL-T 26W/830/2P 1CT/ 5X10BOX |
| EAN/UPC - Product | 8711500611024 |
| Order code | 61102470 |
| Numerator - Quantity Per Pack | 1 |

PHILIPS


# MASTER PL-T 2 Pin

| | |
|---|---|
| Numerator - Packs per outer box | 50 |
| Material Nr. (12NC) | 927914583071 |
| Net Weight (Piece) | 66.000 g |
| ILCOS Code | FSM-26/30/1B-I-GX24d=3 |


## Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

## Dimensional drawing

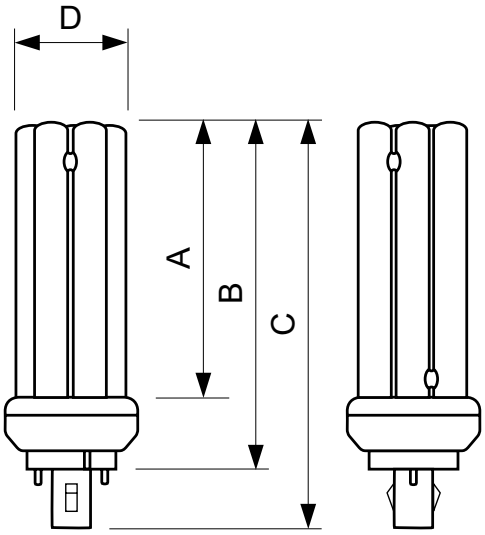



GX24d-3, 2P




PL-T 26W/830/2P M

| Product | D | A | B | C |
|---|---|---|---|---|
| MASTER PL-T 26W/830/2P 1CT/5X10BOX | 41 mm | 86.7 mm | 111.0 mm | 134.2 mm |

## Photometric data

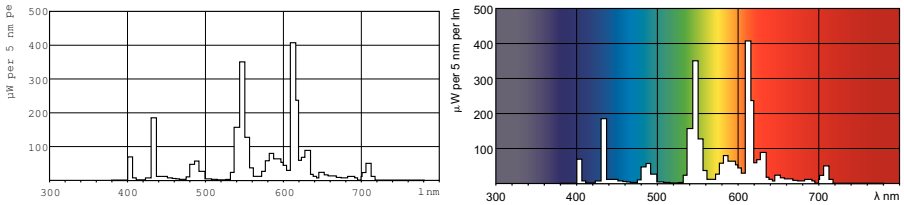


2015, December 28
data subject to change

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

**www.philips.com/lighting**

2015, December 28
data subject to change