

Softone ESaver Candle

Softone Candle 12W WW E14 220-240V 1PF/6

Elegant Energy saving lamp with decorative comfort & design, allows easy replacement of most candle shape incandescent lamp.

Product data

• General Information

Cap-Base	E14 [E14]
Nominal Lifetime (Nom)	10000 h
Switching Cycle	30000X

• Light Technical

Color Code	827 [CCT of 2700K]
Luminous Flux (Nom)	610 lm
Luminous Flux (Rated) (Nom)	610 lm
Color Designation	Warm White (WW)
Lumen Maintenance 2000 h (Nom)	83 %
Chromaticity Coordinate X (Nom)	463
Chromaticity Coordinate Y (Nom)	420
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	51 lm/W
Color Rendering Index (Min)	81
Color Rendering Index (Nom)	82
LLMF At End Of Nominal Lifetime (Nom)	65 %

• Operating and Electrical

Input Frequency	50 or 60 Hz
Power (Rated) (Nom)	12.0 W
Lamp Current (Nom)	80 mA
Wattage Equivalent	52 W
Starting Time (Nom)	1.0 s
Warm Up Time To 60% Light (Min)	10 s
Warm Up Time To 60% Light (Max)	100 s
Power Factor (Nom)	0.6
Voltage (Nom)	220-240 V

• Controls and Dimming

Dimmable	No

• Approval and Application

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Max)	2.0 mg
Mercury (Hg) Content (Nom)	1.5 mg
Energy Consumption kWh/1000 h	12 kWh

• Product Data

Full product code	871829168095600
Order product name	Softone Candle 12W WW E14 220-240V 1PF/6
EAN/UPC - Product	8718291680956
Order code	929689139501
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929689139501

PHILIPS


Softone ESaver Candle

Net Weight (Piece)	0.048 kg


Warnings and Safety

- Breaking a lamp is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a closed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Compact fluorescent lamps have to be treated as special waste, they must be taken to your local waste facilities for recycling. The European Lighting Industry has set up an infrastructure, capable of recycling mercury, other metals, glass etc.

Dimensional drawing

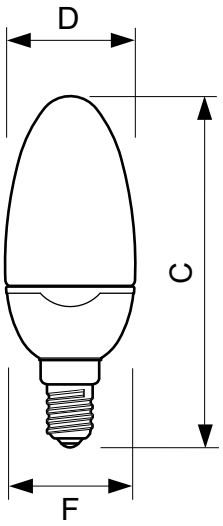

5 W, 8 W, 12 W E14 Erp



Candle 12W/827 E14 220-240V 50/60Hz

Product	D	C	F
Softone Candle 12W WW E14 220-240V 1PF/6	46.5 mm	126.0 mm	43 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change