

HF-Performer II Xtreme for TL5/TL-D lamps

HF-P Xt 236 TL-D EII 220-240V 50/60Hz

Enhance the quality of applications with robust driver technologyHF-Performer Xtreme is a unique X-technology from Philips that guarantees the longest lifetime and highest reliability under the harshest conditions.

Product data

• General Information

Application Code	EII
Type Version	mk1
Lamp Type	TL-D
Number Of Lamps	2 piece/unit
Number Of Products On MCB (16A Type B) (Nom)	12
Automatic Restart	Yes

• Operating and Electrical

Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Operating Frequency (Min)	42 kHz
Ignition Method	Warm Start
Crestfactor (Max)	1.7
Power Factor 100% Load (Nom)	0.96
Ignition Time (Max)	2.0 s
Mains Voltage Performance (AC)	-8%-+6%
Mains Voltage Safety (AC)	-10%-+10%
Earth Leakage Current (Nom)	0.5 mA
Inrush Current Width	0.350 ms
Constant Wattage Deviation	-2%/+2%
Ballast Factor (Nom)	1.0
Power Losses (Nom)	8.0 W
Inrush Current Peak (Max)	31 A

• Wiring

Connector Type	WAGO 251 universal connector
Input Terminals	[Suitable for both automatic wiring (ALF and ADS) and manual wiring]
Cable Capacity Output Wires Mutual (Nom)	200 pF
Connector Type	WAGO 251 universal connector
Output Terminals	[Suitable for both automatic wiring (ALF and ADS) and manual wiring]
Wire Striplength	8.0-9.0 mm
Input Terminal Cross Section	0.50-1.00 mm²
Output Terminal Cross Section	0.50-1.00 mm²
Auto Insert (ALF/ ADS) Wire Cross Section	0.5 mm²
Cable Capacity Output Wires To Earth (Nom)	200 pF

• System characteristics

Rated Ballast-Lamp Power	36 W
Rated Lamp Power On TL-D	36 W
System Power On TL-D	40 W
Lamp Power On TL-D	32 W
Power Loss On TL-D	8 W

• Temperature

T-Ambient (Max)	60 °C

PHILIPS

HF-Performer II Xtreme for TL5/TL-D lamps

T-Ambient (Min)	-25 °C
T-Storage (Max)	80 °C
T-Storage (Min)	-25 °C
T-Case Lifetime (Nom)	75 °C
T-Case Maximum (Max)	75 °C
T-Ignition (Max)	60 °C
T-Ignition (Min)	-25 °C

- Mechanical and Housing

Housing	L 360x30x28

- Emergency Operation

Battery Voltage Lamp Ignition	198 V
Battery Voltage Lamp Operation	176-254


- Approval and Application


Energy Efficiency Index	A2
EMI 9 kHz ... 30 MHz	EN55015
EMI 30 MHz ... 1000 MHz	Level = Class
Safety Standard	IEC 61347-2-3
Performance Standard	IEC 60929
Quality Standard	ISO 9000:2000
Environmental Standard	ISO 14001
Harmonic Current Emission Standard	IEC 61000-3-2
EMC Immunity Standard	IEC 61547
Vibration Standard	IEC 68-2-6 Fc
Bumps Standard	IEC 68-2-29 Eb
Humidity Standard	EN 61347-2-3 clause 11
Approval Marks	CE marking ENEC certificate VDE-EMV certificate
Temperature Marking	Yes
Emergency Standard	IEC 60598-2-22
Hum And Noise Level	Inaudible

- Product Data

Full product code	871150091202230
Order product name	HF-P Xt 236 TL-D EII 220-240V 50/60Hz
EAN/UPC - Product	8711500912022
Order code	913700617866
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	913700617866
Net Weight (Piece)	0.400 kg

Dimensional drawing

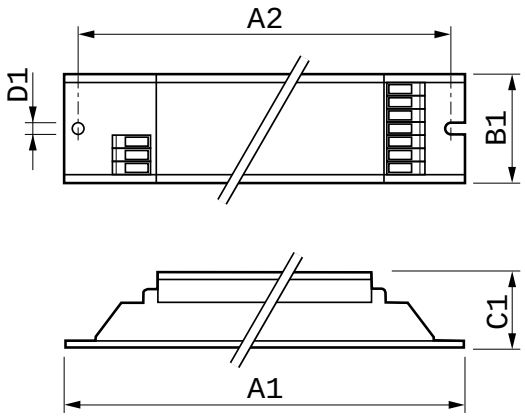

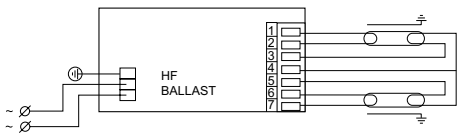

HF-P Xt 236 TL-D EII 220-240V 50/60Hz

Product	D1	C1	A1	A2	B1
HF-P Xt 236 TL-D EII 220-240V 50/60Hz	4.2 mm	28.0 mm	360.0 mm	350.0 mm	30.0 mm



© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 23
data subject to change