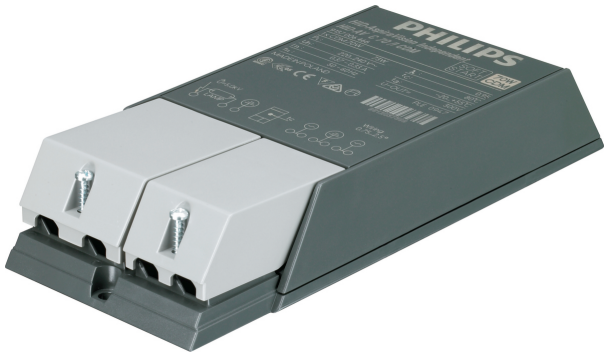


AspiraVision Compact for CDM

HID-AV C 35 /I CDM 220-240V 50/60Hz

AspiraVision is the mark of excellence in HID electronic gear technology – high-end, compact, lightweight and easy to use, with added features for optimal performance of 35, 50 and 70 W CDM lamps.The recently added switching function provides maximum flexibility for users by integrating three different wattage choices into a single driver.

Product data

• General Information

Application Code	-
Lamp Type	CDM
Number Of Lamps	1 piece/unit
Suitable For Outdoor Use	No
Automatic Restart	Yes

• Operating and Electrical

Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Minimum Mains Voltage Operation (Min)	198 V
Ignition Switch-Off Time (Nom)	20 min
Mains Voltage Performance (AC)	-10%-+6%
Mains Voltage Safety (AC)	-18%-+10%
Earth Leakage Current (Max)	0.5 mA
Output Peak Voltage (Max)	4000 V
Lamp Power Tolerance	-3%/+3%
Input Current (Nom)	0.23 A

• Wiring

Wire Striplength	10.0-11.0 mm
Ballast Contact Wire Cross Section	0.50-2.50 mm²
Connector Type	Insert

• System characteristics

Rated Ballast-Lamp Power	35 W
Rated Lamp Power On CDM	39 W
System Power On CDM	44 W
Lamp Power On CDM	39 W
Power Loss On CDM	5 W

• Temperature

T-Ambient (Max)	55 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	80 °C
T-Storage (Min)	-25 °C
T-Case Switch Off (Min)	85 °C

• Controls and Dimming

Control Interface	-

• Mechanical and Housing

Housing	/I

• Approval and Application

Surge Protection (Common/Differential)	EN61547(L-L 1kV, L-G 2kV) kV
Overvoltage Protection 400Vac	5 min

PHILIPS


AspiraVision Compact for CDM


Active Temperature Protection	Yes
EMI 9 kHz ... 300 MHz	CISPR 15 ed 7.2
Vibration Standard	IEC 68-2-6 Fc
Bumps Standard	IEC 68-2-29 Eb
Humidity Standard	EN 61347-2-3 and 2-1
Approval Marks	F-Marking CE marking ENEC certificate VDE certificate CB Certificate VDE-EMC marking
Hum And Noise Level	20 dB(A)


- Product Data

Full product code	872790088524800
Order product name	HID-AV C 35 /I CDM 220-240V 50/60Hz
EAN/UPC - Product	8711500881663
Order code	913700647666
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	913700647666
Net Weight (Piece)	0.260 kg

Dimensional drawing

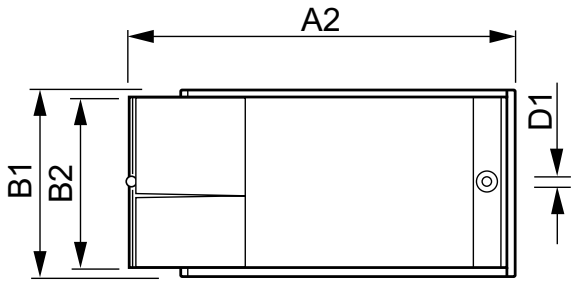

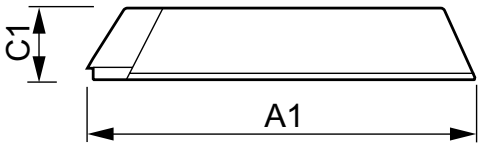

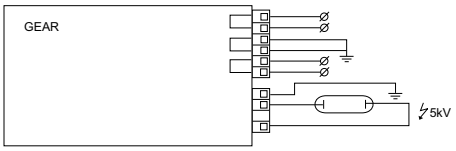

HID-AV C 35 /I CDM 220-240V 50/60Hz

Product	D1	C1	A1	A2	B1
HID-AV C 35 /I CDM 220-240V 50/60Hz	4.8 mm	34.5 mm	188 mm	170 mm	82.7 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 23
data subject to change