

HalogenA IDE

HalogenA IDE 2000W E40 230V CL 1CT/6

Mains-voltage high-wattage double-envelope giving a white halogen light

Product data

• General Information

Cap-Base	E40 [E40]
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Luminous Flux (Nom)	50000 lm
Luminous Flux (Rated) (Nom)	50000 lm
Correlated Color Temperature (Nom)	2900 K
Luminous Efficacy (rated) (Nom)	24 lm/W
Color Rendering Index (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %

• Operating and Electrical

Power (Rated) (Nom)	2000.0 W
Lamp Current (Nom)	8.7 A
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Bulb Finish	Clear

• Approval and Application

Energy Efficiency Label (EEL)	C
Energy Consumption kWh/1000 h	2000 kWh


• Product Data

Full product code	871150049130510
Order product name	HalogenA IDE 2000W E40 230V CL 1CT/6
EAN/UPC - Product	8711500491305
Order code	923900344240
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	923900344240
Net Weight (Piece)	146.000 g
ILCOS Code	HEGT-2000-230-e40


PHILIPS

HalogenA IDE

Dimensional drawing

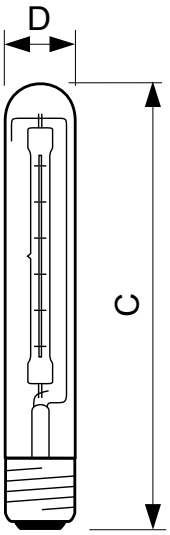

E27/E40, T38



IDE 2000W E40 230V T38 CL

Product	D	C
HalogenA IDE 2000W E40 230V CL 1CT/6	38.5 mm	300 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change