

Plusline Large (double ended)

Plusline Large 1500W R7s 230V 1CT/10

Mains-voltage linear with a coiled-coil filament, giving white halogen light

Product data

• General Information

Cap-Base	R7S [R7s]
Operating Position	P4 [Parallel +/-4D or Horizontal(HOR)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Luminous Flux (Nom)	33000 lm
Luminous Flux (Rated) (Nom)	33000 lm
Colour Temperature, horizontal (Nom)	2900 K
Luminous Efficacy (rated) (Nom)	22 lm/W
Colour Rendering Index horiz (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %

• Operating and Electrical

Power (Rated) (Nom)	1500.0 W
Lamp Current (Nom)	6.52 A
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Bulb Finish	Clear (CL)

• Approval and Application

Energy Efficiency Label	C
Energy Consumption kWh/1000 h	1500 kWh

• Luminaire Design Requirements

Bulb Temperature (Max)	900 °C
Pinch Temperature (Max)	350 °C


• Product Data

Full product code	871150049435101
Order product name	Plusline Large 1500W R7s 230V 1CT/10
EAN/UPC - Product	8711500494351
Order code	49435101
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	923932243203
Net Weight (Piece)	0.021 kg
ILCOS Code	HDG//RS-1500-230-R7s-250,7


PHILIPS

Plusline Large (double ended)

Dimensional drawing

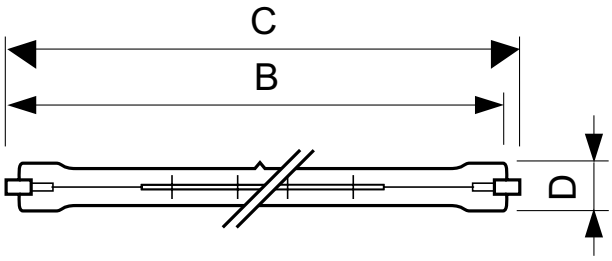

R7s, T11/T12



DEBig 1500W R7s 230V T11 CL

Product	D	B	B	B	C
Plusline Large 1500W R7s 230V 1CT/10	11 mm	252.3 mm	250.7 mm	249.1 mm	254.1 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change