

Capsuleline

Capsuleline 75W GY6.35 12V CL 4000H 1CT/10X10F

Single-ended low-voltage halogen capsule giving crisp white halogen light

PHILIPS

Capsuleline

Product data

- General Information

Cap-Base	GY6.35 [GY6.35]
Philips Code	13101
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	4000 h
Switching Cycle	16000X

- Light Technical

Luminous Flux (Nom)	1400 lm
Luminous Flux (Rated) (Nom)	1400 lm
Colour Temperature, horizontal (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	18.8 lm/W
Colour Rendering Index horiz (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %

- Operating and Electrical

Power (Rated) (Nom)	75.0 W
Lamp Current (Nom)	6.25 A
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	12 V

- Controls and Dimming

Dimmable	Yes

- Mechanical and Housing

Bulb Finish	Clear (CL)
Cap-Base Information	15

- Approval and Application

Energy Efficiency Label	C
Energy Consumption kWh/1000 h	80 kWh


- Luminaire Design Requirements

Bulb Temperature (Max)	900 °C
Pinch Temperature (Max)	350 °C

- Product Data

Full product code	871150040216550
Order product name	Capsuleline 75W GY6.35 12V CL 4000h 1CT/10X10F
EAN/UPC - Product	8711500402165
Order code	40216550
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	100
Material Nr. (12NC)	924040117101
Net Weight (Piece)	2.300 g
ILCOS Code	HSG/C/UB-75-12-GY6.35

Dimensional drawing

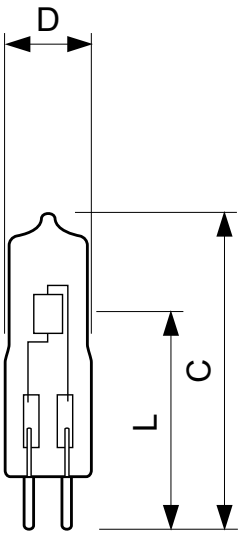


GY6.35, T11

CAP SU 13101 75W GY6.35 12V CL

Product	D	L	C
Capsuleline 75W GY6.35 12V CL 4000h 1CT/10X10F	12 mm	30 mm	44 mm

Dimensional drawing



© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.