

Accentline

Accentline 35W GU5.3 12V 36D 1CT/10X5F

Low-voltage halogen burner optically positioned in a glass reflector with and without front glass

Product data

• General Information

Cap-Base	GU5.3 [GU5.3]
Philips Code	14598
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Beam Angle (Nom)	36 °
Luminous Intensity (Max)	800 cd
Colour Temperature, horizontal (Nom)	3000 K
Colour Rendering Index horiz (Nom)	100
Luminous Flux In 90° Cone (Rated)	430 lm

• Operating and Electrical

Power (Rated) (Nom)	35 W
Lamp Current (Nom)	2.92 A
Starting Time (Nom)	0.0 s
Voltage (Nom)	12 V

• Controls and Dimming

Dimmable	Yes

• Approval and Application

Energy Efficiency Label	B

• Luminaire Design Requirements


Cap-Base Temperature (Max)	250 °C

• Product Data


Full product code	871150041202700
Order product name	Accentline 35W GU5.3 12V 36D 1CT/10X5F
EAN/UPC - Product	8711500412027
Order code	41202700
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	924049617191
Net Weight (Piece)	0.032 kg
ILCOS Code	HRGI-50-12-GU5.3-35/36

PHILIPS

Dimensional drawing

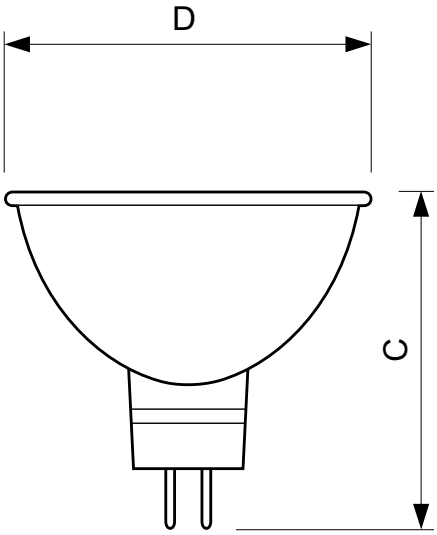

GU5.3, MR16



Fighter 14598 35W GU5.3 12V MR16 36D

Product	D	C
Accentline 35W GU5.3 12V 36D 1CT/10X5F	51 mm	46 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting