

Twistline Alu 3000 hours

Twistline Alu 3000h 50W GU10 230V 25D 1CT/10X5F

Mains-voltage 51 mm diameter reflector lamp with Aluminium reflector

Product data

• General Information

Cap-Base	GU10 [GU10]
Philips Code	18029
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	3000 h
Switching Cycle	12000X

• Light Technical

Beam Angle (Nom)	25 °
Luminous Flux (Rated) (Nom)	385 lm
Luminous Intensity (Max)	700 cd
Rated Beam Angle	25 °
Colour Temperature, horizontal (Nom)	2800 K
Colour Rendering Index horiz (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %
Luminous Flux In 90° Cone (Rated)	385 lm

• Operating and Electrical

Power (Rated) (Nom)	50.0 W
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Bulb Finish	Clear (CL)

• Approval and Application

Energy Efficiency Label	D
Energy Consumption kWh/1000 h	50 kWh


• Product Data

Full product code	871150064932460
Order product name	Twistline Alu 3000h 50W GU10 230V 25D 1CT/10X5F
EAN/UPC - Product	8711500649324
Order code	64932460
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	924880644264
Net Weight (Piece)	38.400 g
ILCOS Code	HAGS-50-230-GU10-51/25


PHILIPS

Twistline Alu 3000 hours

Dimensional drawing

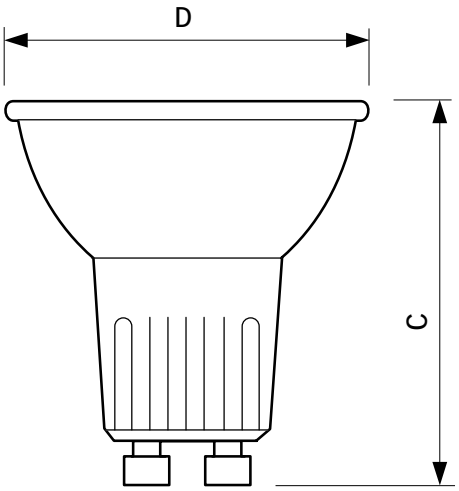

GU10, MR16



TWIST Alu 18029 50W GU10 230V 25D

Product	D	C
Twistline Alu 3000h 50W GU10 230V 25D 1CT/10X5F	51 mm	51 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change