

Twistline Alu 2000 hours

Twistline Alu 2000h 50W GU10 230V 20D 1CT/10X5F

Mains-voltage halogen burner in glass reflector. Ideal solution for small decorative luminaires, putting your objects in a superior-quality spot light. Aluminum coating prevents heat in the backlight.

Product data

• General Information

Cap-Base	GU10 [GU10]
Philips Code	na [-]
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Beam Angle (Nom)	20 °
Luminous Flux (Rated) (Nom)	330 lm
Luminous Intensity (Max)	1000 cd
Rated Beam Angle	20 °
Correlated Color Temperature (Nom)	2800 K
Color Rendering Index (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %
Luminous Flux In 90° Cone (Rated)	330 lm

• Operating and Electrical

Power (Rated) (Nom)	50.0 W
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Bulb Finish	Clear

• Approval and Application

Energy Efficiency Label (EEL)	D
Energy Consumption kWh/1000 h	50 kWh


• Product Data

Full product code	871150042847960
Order product name	Twistline Alu 2000h 50W GU10 230V 20D 1CT/10X5F
EAN/UPC - Product	8711500428479
Order code	924887244225
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	924887244225
Net Weight (Piece)	0.008 kg
ILCOS Code	HAGS-35-230-GU10-51/20


PHILIPS

Twistline Alu 2000 hours

Dimensional drawing

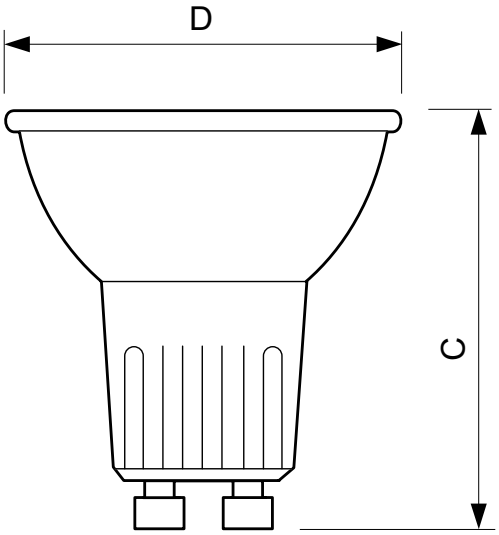

GU10, MR16/PAR20



TWIST Alu 50W GU10 230V 20D

Product	D	C
Twistline Alu 2000h 50W GU10 230V 20D 1CT/10X5F	50.7 mm	51 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change