

Capsuleline

Capsuleline 20W G4 12V CL 2000h 1CT/10X10F

Single-ended low-voltage halogen capsule giving crisp white halogen light

PHILIPS

Capsuleline

Product data

• General Information

Cap-Base	G4 [G4]
Philips Code	14729
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Luminous Flux (Nom)	255 lm
Luminous Flux (Rated) (Nom)	255 lm
Colour Temperature, horizontal (Nom)	2800 K
Luminous Efficacy (rated) (Nom)	12.5 lm/W
Colour Rendering Index horiz (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %

• Operating and Electrical

Power (Rated) (Nom)	20.0 W
Lamp Current (Nom)	1.67 A
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	12 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Bulb Finish	Clear (CL)
Cap-Base Information	na [-]

• Approval and Application

Energy Efficiency Label	C
Energy Consumption kWh/1000 h	21 kWh


• Luminaire Design Requirements

Bulb Temperature (Max)	220 °C
Pinch Temperature (Max)	350 °C

• Product Data

Full product code	871150041299750
Order product name	Capsuleline 20W G4 12V CL 2000h 1CT/10X10F
EAN/UPC - Product	8711500412997
Order code	41299750
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	100
Material Nr. (12NC)	924892017111
Net Weight (Piece)	0.001 kg
ILCOS Code	HSG/C/UB-20-12-G4

Dimensional drawing

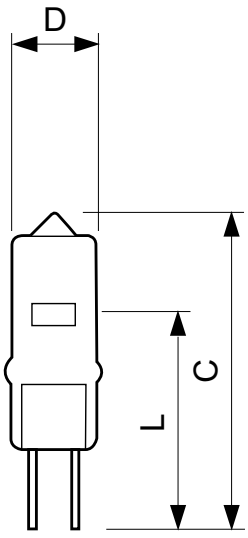


G4/GY6.35, Fighter

CAP Fighter 14729 20W G4 12V CL

Product	D	L	C
Capsuleline 20W G4 12V CL 2000h 1CT/10X10F	10 mm	22 mm	33 mm

Dimensional drawing



© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.