

Halogen Clickline G9

Halogen MV Click 28W G9 230V CL 1CT

Ideal solution for small decorative luminaires. UV-block glass and safety fuse allow usage without cover glass. The compact Clickline gives crisp white light over a long lifetime.

Product data

• General Information

Cap-Base	G9 [G9]
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Luminous Flux (Nom)	370 lm
Luminous Flux (Rated) (Nom)	370 lm
Colour Temperature, horizontal (Nom)	2800 K
Luminous Efficacy (rated) (Nom)	12.1 lm/W
Colour Rendering Index horiz (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %

• Operating and Electrical

Power (Rated) (Nom)	28.0 W
Lamp Current (Nom)	0.12 A
Wattage Equivalent	40 W
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Bulb Finish	Clear (CL)

• Approval and Application

Energy Efficiency Label	D
Energy Consumption kWh/1000 h	28 kWh

• Luminaire Design Requirements

Bulb Temperature (Max)	950 °C
Pinch Temperature (Max)	350 °C


• Product Data

Full product code	872790086398700
Order product name	Halogen MV Click 28W G9 230V CL 1CT
EAN/UPC - Product	8727900863987
Order code	86398700
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	100
Material Nr. (12NC)	925640644205
Net Weight (Piece)	3.300 g


PHILIPS

Halogen Clickline G9

Dimensional drawing

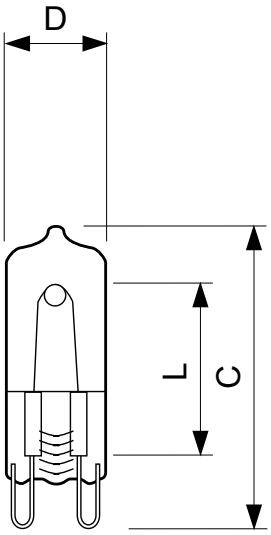

G9



CLICKLINE 28W G9 230V CL

Product	D	L	C
EcoHalo MV Click 28W G9 230V CL 1CT	13 mm	21.7 mm	45 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change