

HalogenA PAR16

HalogenA PAR16 40W E14 230V 25D 1CT/15

Mains-voltage 50 mm diameter reflector lamp

Product data

• General Information

Cap-Base	E14 [E14]
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Beam Angle (Nom)	25 °
Luminous Flux (Rated) (Nom)	260 lm
Luminous Intensity (Max)	680 cd
Rated Beam Angle	25 °
Colour Temperature, horizontal (Nom)	2800 K
Colour Rendering Index horiz (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %
Luminous Flux In 90° Cone (Rated)	260 lm

• Operating and Electrical

Power (Rated) (Nom)	40.0 W
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Approval and Application

Energy Efficiency Label	D
Energy Consumption kWh/1000 h	40 kWh


• Product Data

Full product code	871150049753620
Order product name	HalogenA PAR16 40W E14 230V 25D 1CT/15
EAN/UPC - Product	8711500497536
Order code	49753620
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	15
Material Nr. (12NC)	924526644213
Net Weight (Piece)	0.054 kg
ILCOS Code	HEGPAR-40-230-E14-50/30


PHILIPS

HalogenA PAR16

Dimensional drawing

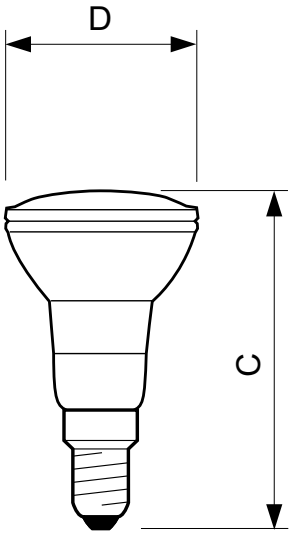

E14, PAR16



PAR16 40W E14 230V 25D

Product	D	C
HalogenA PAR16 40W E14 230V 25D 1CT/15	51 mm	79 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change