

HalogenA PAR30S

HalogenA PAR30S 75W E27 230V 30D 1CT/15

Mains-voltage 97 mm diameter reflector lamp

Product data

• General Information

Cap-Base	E27 [E27]
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Beam Angle (Nom)	30 °
Luminous Flux (Rated) (Nom)	725 lm
Luminous Intensity (Max)	1700 cd
Rated Beam Angle	30 °
Colour Temperature, horizontal (Nom)	2800 K
Colour Rendering Index horiz (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %
Luminous Flux In 90° Cone (Rated)	725 lm

• Operating and Electrical

Power (Rated) (Nom)	75.0 W
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Approval and Application

Energy Efficiency Label	D
Energy Consumption kWh/1000 h	75 kWh


• Product Data

Full product code	871150050439520
Order product name	HalogenA PAR30S 75W E27 230V 30D 1CT/15
EAN/UPC - Product	8711500504395
Order code	50439520
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	15
Material Nr. (12NC)	924710844204
Net Weight (Piece)	0.176 kg
ILCOS Code	HEGPAR-75-230-E27-95S/30

PHILIPS

HalogenA PAR30S

Dimensional drawing

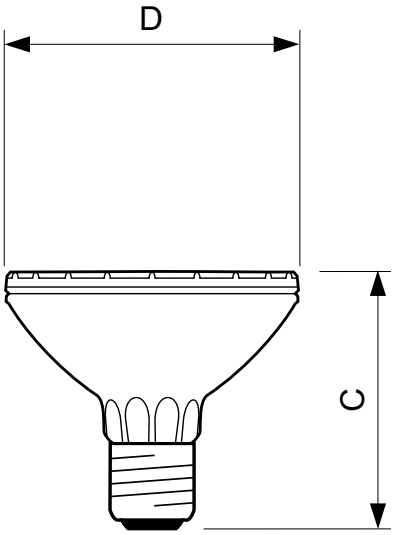

E27, PAR30S



PAR30S 75W E27 230V 30D

Product	D	C
HalogenA PAR30S 75W E27 230V 30D 1CT/15	96 mm	99 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change