

MHN-TD

MHN-TD 150W/842 RX7s 1CT/12

Double-ended quartz Metal-halide lamp

Product data

• General Information

Cap-Base	RX7S [RX7s]
Operating Position	P45 [Parallel +/-45D or Horizontal(HOR)]
Life To 5% Failures (Min)	4000 h
Life To 5% Failures (Nom)	5000 h
Life To 20% Failures (Min)	6500 h
Life To 20% Failures (Nom)	8000 h
Life To 50% Failures (Min)	8500 h
Life To 50% Failures (Nom)	10500 h
ANSI Code HID	M81/E
Footnotes HID 1	Color characteristics may vary somewhat from one lamp type to another. Time should be allowed for the lamp to stabilize in color when it is turned on for the first time or if for any reason its operating position is changed. This may require several hours' operation, with more than one start. Lamp color and output may change temporarily if the lamp is subjected to excess vibration or shock. Lamp color characteristics may change after long accumulate operating time.
Footnotes HID 2	Supply volts must be +/- 5% of rated ballast line volts for reactor type and +/- 10% for CWA or electronic ballasts.

• Light Technical

Colour Code	842 [CCT of 4200K]
Luminous Flux (Rated) (Min)	11600 lm
Luminous Flux (Rated) (Nom)	12900 lm
Colour Designation	Cool White (CW)
Lumen Maintenance 10000 h (Min)	60 %
Lumen Maintenance 10000 h (Nom)	70 %
Lumen Maintenance 2000 h (Min)	74 %
Lumen Maintenance 2000 h (Nom)	80 %
Lumen Maintenance 5000 h (Min)	68 %
Lumen Maintenance 5000 h (Nom)	75 %
Chromaticity Coordinate X (Nom)	370
Chromaticity Coordinate Y (Nom)	370
Colour Temperature, horizontal (Nom)	4200 K
Luminous Efficacy (rated) (Min)	75 lm/W
Luminous Efficacy (rated) (Nom)	86 lm/W
Colour Rendering Index horiz (Nom)	85

• Operating and Electrical

Power (Rated) (Nom)	150.0 W

PHILIPS

Lamp Current Run-Up (Max)	2.4 A
Lamp Current (EM) (Nom)	1.8 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Ignition Peak Voltage (Min)	3500 V
Voltage (Max)	108 V
Voltage (Min)	88 V
Voltage (Nom)	98 V

• Controls and Dimming

Dimmable	No

• Mechanical and Housing

Bulb Finish	Clear (CL)
Cap-Base Information	na [-]

• Approval and Application

Energy Efficiency Label	A+
Mercury (Hg) Content (Nom)	13 mg
Energy Consumption kWh/1000 h	165 kWh

• Luminaire Design Requirements

Bulb Temperature (Max)	650 °C
Pinch Temperature (Max)	280 °C


• Product Data

Full product code	871829121536300
Order product name	MHN-TD 150W/842 RX7s 1CT/12
EAN/UPC - Product	8718291215363
Order code	21536300
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928076505190
Net Weight (Piece)	0.028 kg
ILCOS Code	MD/UB-150/842-H-RX7s-25/135.4

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

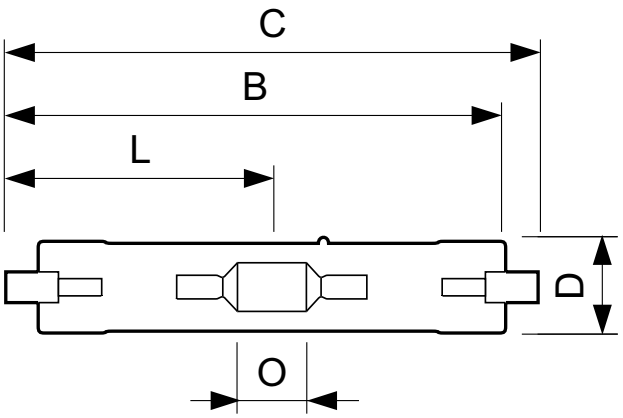


MHN-TD, RX7s


MHN-TD 150W/842 RX7s

Product	D	D	O	C
MHN-TD 150W/842 RX7s 1CT/12	23.0 mm	0.89 in	17.8 mm	135.4 mm

Dimensional drawing



Photometric data

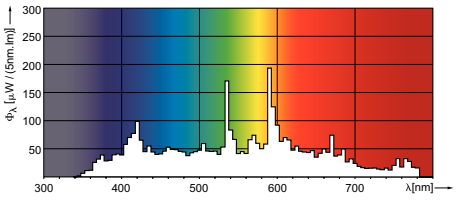

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, March 7
data subject to change