

MASTERColour CDM-T Elite

MASTERColour CDM-T Elite 70W/930 G12 1CT/12

Single-ended, high-efficiency Ceramic Metal Halide discharge lamp

Product data

• General Information

Cap-Base	G12 [G12]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life To 5% Failures (Nom)	12000 h
Life To 10% Failures (Nom)	14000 h
Life To 20% Failures (Nom)	16000 h
Life To 50% Failures (Nom)	20000 h
ANSI Code HID	C139/E

• Light Technical

Colour Code	930 [CCT of 3000K]
Luminous Flux (Rated) (Nom)	7500 lm
Colour Designation	Warm White (WW)
Lumen Maintenance 1000 h (Nom)	97 %
Lumen Maintenance 12000 h (Nom)	82 %
Lumen Maintenance 10000 h (Nom)	83 %
Lumen Maintenance 2000 h (Nom)	95 %
Lumen Maintenance 4000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	88 %
Chromaticity Coordinate X (Nom)	0.435
Chromaticity Coordinate Y (Nom)	0.396
Colour Temperature, horizontal (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	103 lm/W
Colour Rendering Index horiz (Min)	87
Colour Rendering Index horiz (Nom)	90

• Operating and Electrical

Power (Rated) (Nom)	73 W
Lamp Current Run-Up (Max)	2 A
Lamp Current (EM) (Nom)	1 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	90 V
Voltage (Min)	79 V
Voltage (Nom)	85 V

• Controls and Dimming

Dimmable	No
Run-up Time 90% (Max)	3 min
Run-up Time 90% (Nom)	1.5 min

PHILIPS

MASTERColour CDM-T Elite

- Mechanical and Housing

Bulb Finish	Clear (CL)

- Approval and Application

Energy Efficiency Label	A+
Mercury (Hg) Content (Nom)	6.6 mg
Energy Consumption kWh/1000 h	80 kWh

- UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3

- Luminaire Design Requirements

Bulb Temperature (Max)	500 °C
Cap-Base Temperature (Max)	250 °C
Pinch Temperature (Max)	350 °C


- Product Data

Full product code	872790091141100
Order product name	MASTERColour CDM-T Elite 70W/930 G12 1CT/12
EAN/UPC - Product	8727900911411
Order code	91141100
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928185305131
Net Weight (Piece)	0.029 kg
ILCOS Code	MT/UB-70/930-H-G12-20/90

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear. 35W & 70W lamps may also use electromagnetic gear.
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

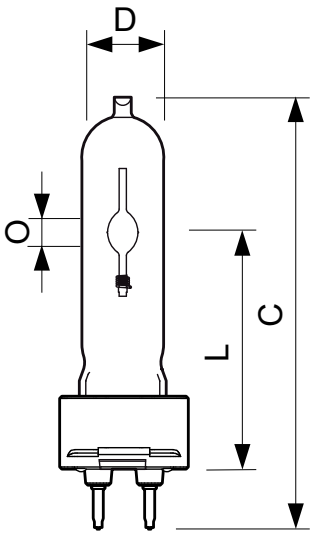


CDM-T Elite 35W - 150W G12


CDM-T Elite 70W/930 G12

Product	D	O	L	L	L	C
MASTERColour CDM-T Elite 70W/930 G12 1CT/12	20 mm	7.15 mm	55 mm	57 mm	56 mm	103 mm

Dimensional drawing



Photometric data

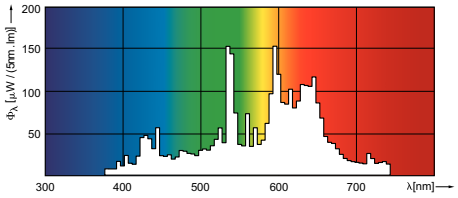

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting