

MASTER CityWhite CDO-TT

MASTER CityWhite CDO-TT Plus 100W/828 E40

Ceramic metal halide Outdoor with clear tubular outer bulb

Product data

• General Information

Cap-Base	E40 [E40]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life To 5% Failures (Nom)	18000 h
Life To 10% Failures (Nom)	20000 h
Life To 20% Failures (Nom)	22500 h
Life To 50% Failures (Nom)	27000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	97 %
LSF 20000 h Rated	90 %

• Light Technical

Colour Code	828 [CCT of 2800K]
Luminous Flux (Rated) (Nom)	10500 lm
Colour Designation	Warm White (WW)
Chromaticity Coordinate X (Nom)	445
Chromaticity Coordinate Y (Nom)	395
Colour Temperature, horizontal (Nom)	2800 K
Luminous Efficacy (rated) (Nom)	108 lm/W
Colour Rendering Index horiz (Nom)	88
Depreciation 2000 hrs	95 %
LLMF 4000 h Rated	92 %
Depreciation 5000 hrs	90 %
LLMF 8000 h Rated	88 %
LLMF 12000 h Rated	85 %
LLMF 16000 h Rated	82 %
LLMF 20000 h Rated	80 %

• Operating and Electrical

Power (Rated) (Nom)	97.0 W
Lamp Current Run-Up (Max)	2.2 A
Lamp Current (EM) (Nom)	1.2 A
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	900 s
Ignition Time (Max)	30 s
Voltage (Max)	105 V
Voltage (Min)	89 V
Voltage (Nom)	97 V

• Controls and Dimming

Dimmable	Yes
Run-up Time 90% (Max)	2 min

• Mechanical and Housing

Bulb Finish	Clear (CL)

PHILIPS

MASTER CityWhite CDO-TT

- Approval and Application

Energy Efficiency Label	A+
Mercury (Hg) Content (Nom)	11.6 mg
Energy Consumption kWh/1000 h	107 kWh

- UV

Pet (Niosh) (Min)	8 h/500lx

- Luminaire Design Requirements

Bulb Temperature (Max)	450 °C
Cap-Base Temperature (Max)	250 °C


- Product Data

Full product code	871829112032200
Order product name	MASTER CityWhite CDO-TT Plus 100W/828 E40
EAN/UPC - Product	8718291120322
Order code	12032200
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928082119231
Net Weight (Piece)	0.137 kg
ILCOS Code	MT-100/828-H-E40-48/211

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Lamps may use electromagnetic control gear or electronic gear suitable to drive CDO lamps (e.g. HID-PV Xt CDO)
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Warm restart time can be up to 15 minutes; T15 ignitors therefore advised
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

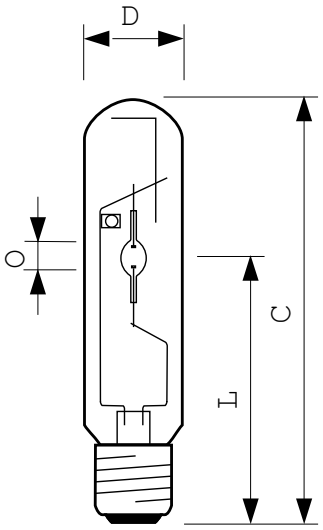


CDO-TT Plus, E40

CDO-TT Plus 100W/828 E40


Product	D	O	L	C
MASTER CityWhite CDO-TT Plus 100W/828 E40	47 mm	8.5 mm	132 mm	211 mm

MASTER CityWhite CDO-TT

Dimensional drawing



Photometric data

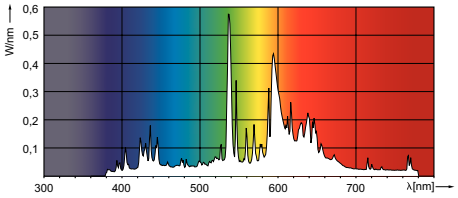

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, March 7
data subject to change