

MASTER SON-T APIA Plus Xtra

MASTER SON-T APIA Plus Xtra 50W E27 1SL/12

High Pressure Sodium lamp with clear tubular outer bulb shape, high output and longest reliable lifetime

Product data

• General Information

Cap-Base	E27
Operating Position	UNIVERSAL [Any or Universal (U)]
Life To 5% Failures (Nom)	21000 h
Life To 10% Failures (Nom)	25000 h
Life To 20% Failures (Nom)	29500 h
Life To 50% Failures (Nom)	38000 h
System Description	External Ignitor
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	98 %
LSF 20000 h Rated	96 %

• Light Technical

Color Code	- [Not Specified]
Luminous Flux (Rated) (Nom)	4700 lm
Chromaticity Coordinate X (Nom)	540
Chromaticity Coordinate Y (Nom)	420
Correlated Color Temperature (Nom)	1950 K
Luminous Efficacy (rated) (Nom)	87 lm/W
Color Rendering Index (Max)	25
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	90 %
LLMF 6000 h Rated	89 %
LLMF 8000 h Rated	88 %
LLMF 12000 h Rated	87 %
LLMF 16000 h Rated	86 %
LLMF 20000 h Rated	86 %

• Operating and Electrical

Power (Rated) (Nom)	54.0 W
Lamp Current (EM) (Nom)	0.75 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	1800 V
Re-Ignition Time (Min) (Max)	30 s
Ignition Time (Max)	5 s
Voltage (Max)	100 V
Voltage (Min)	70 V
Voltage (Nom)	85 V

• Controls and Dimming

Dimmable	Yes
Run-Up Time 90% (Max)	4 min

• Mechanical and Housing

Bulb Finish	Clear

• Approval and Application

Energy Efficiency Label (EEL)	A

PHILIPS

MASTER SON-T APIA Plus Xtra

Mercury (Hg) Content (Nom)	12.0 mg
Energy Consumption kWh/1000 h	59 kWh

- Luminaire Design Requirements

Bulb Temperature (Max)	350 °C
Cap-Base Temperature (Max)	200 °C

- Product Data


Full product code	872790093358100

Order product name	MASTER SON-T APIA Plus Xtra 50W E27 1SL/12
EAN/UPC - Product	8727900933581
Order code	928150019227
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928150019227
Net Weight (Piece)	0.046 kg
ILCOS Code	ST-50-H/E-27

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- HF gear must comply with Philips LDi guideline
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

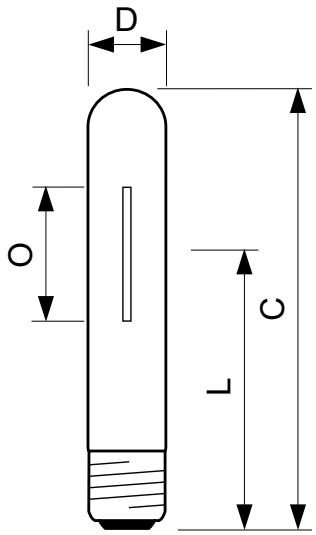

SON-T APIA Plus, E27/E40




SON-T APIA Plus Xtra 50W E27

Product	D	O	L	C
MASTER SON-T APIA Plus Xtra 50W E27 1SL/12	36 mm	35 mm	102 mm	156 mm

MASTER SON-T APIA Plus Xtra

Photometric data

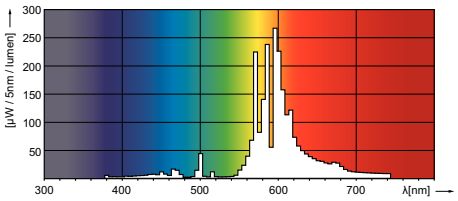

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, March 7
data subject to change