

MASTER CityWhite CDO-ET

MASTER CityWhite CDO-ET Plus 100W/828 E40

Ceramic metal halide Outdoor with opalized ovoid outer bulb

Product data

• General Information

Cap-Base	E40 [E40]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life To 5% Failures (Nom)	18000 h
Life To 10% Failures (Nom)	20000 h
Life To 20% Failures (Nom)	22500 h
Life To 50% Failures (Nom)	27000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	97 %
LSF 20000 h Rated	90 %

• Light Technical

Colour Code	828 [CCT of 2800K]
Luminous Flux (Rated) (Nom)	9400 lm
Colour Designation	Warm White (WW)
Chromaticity Coordinate X (Nom)	444
Chromaticity Coordinate Y (Nom)	403
Colour Temperature, horizontal (Nom)	2890 K
Luminous Efficacy (rated) (Nom)	100 lm/W
Colour Rendering Index horiz (Nom)	87
Depreciation 2000 hrs	95 %
LLMF 4000 h Rated	92 %
Depreciation 5000 hrs	90 %
LLMF 8000 h Rated	88 %
LLMF 12000 h Rated	85 %
LLMF 16000 h Rated	82 %
LLMF 20000 h Rated	80 %

• Operating and Electrical

Power (Rated) (Nom)	94.0 W
Lamp Current Run-Up (Max)	2.2 A
Lamp Current (EM) (Nom)	1.24 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	900 s
Ignition Time (Max)	30 s
Voltage (Max)	98 V
Voltage (Min)	82 V
Voltage (Nom)	90 V

• Controls and Dimming

Dimmable	Yes
Run-up Time 90% (Max)	2 min

PHILIPS

MASTER CityWhite CDO-ET

- Mechanical and Housing

Bulb Finish	Coated [Coated glass (CO)]

- Approval and Application

Energy Efficiency Label	A+
Mercury (Hg) Content (Nom)	11.6 mg
Energy Consumption kWh/1000 h	103 kWh

- UV

Pet (Niosh) (Min)	8 h/500lx

- Luminaire Design Requirements

Bulb Temperature (Max)	450 °C
Cap-Base Temperature (Max)	250 °C


- Product Data

Full product code	871829115877600
Order product name	MASTER CityWhite CDO-ET Plus 100W/828 E40
EAN/UPC - Product	8718291158776
Order code	15877600
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928154808835
Net Weight (Piece)	0.130 kg
ILCOS Code	ME100/28/1B-H-E40

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Lamps may use electronic or electromagnetic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Warm restart time can be up to 15 minutes; T15 ignitors therefore advised
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

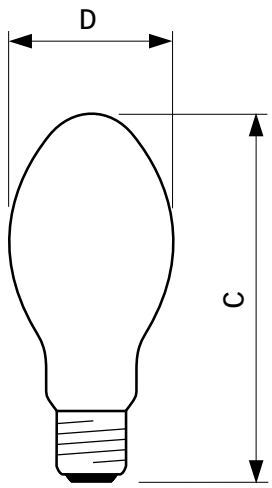


CDO-ET

CDO-ET Plus 100W/828 E40


Product	D	C
MASTER CityWhite CDO-ET Plus 100W/828 E40	76 mm	186 mm

MASTER CityWhite CDO-ET

Dimensional drawing



Photometric data

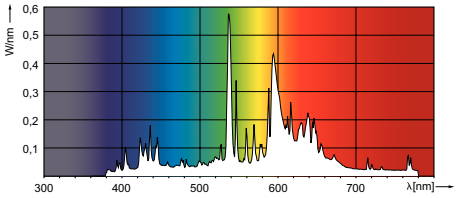

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, March 7
data subject to change