

MASTER HPI Plus

MASTER HPI Plus 400W/645 BU-P E40 1SL/6

Quartz metal halide lamps with opalized outer bulb

Product data

• General Information

Cap-Base	E40 [E40]
Operating Position	H15 [Hanging +/-15D or Base Up (BU)]
Life To 5% Failures (Nom)	5000 h
Life To 10% Failures (Nom)	7500 h
Life To 20% Failures (Nom)	11000 h
Life To 50% Failures (Nom)	20000 h
System Description	Base-Up/Protected
LSF 2000 h Rated	99 %
LSF 4000 h Rated	96 %
LSF 6000 h Rated	93 %
LSF 8000 h Rated	88 %
LSF 12000 h Rated	76 %
LSF 16000 h Rated	63 %
LSF 20000 h Rated	50 %

• Light Technical

Color Code	645 [CCT of 4500K]
Luminous Flux (Rated) (Nom)	32500 lm
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	367
Chromaticity Coordinate Y (Nom)	374
Correlated Color Temperature (Nom)	4500 K
Luminous Efficacy (rated) (Nom)	82 lm/W
Color Rendering Index (Nom)	65
LLMF 2000 h Rated	90 %
LLMF 4000 h Rated	82 %
LLMF 6000 h Rated	77 %
LLMF 8000 h Rated	73 %
LLMF 12000 h Rated	68 %
LLMF 16000 h Rated	63 %
LLMF 20000 h Rated	60 %

• Operating and Electrical

Power (Rated) (Nom)	395.0 W
Lamp Current Run-Up (Max)	6 A
Lamp Current (EM) (Nom)	3.4 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Ignition Time (Max)	10 s
Voltage (Max)	135 V
Voltage (Min)	115 V
Voltage (Nom)	125 V

• Controls and Dimming

Dimmable	No

• Mechanical and Housing

Bulb Finish	Coated glass

PHILIPS

MASTER HPI Plus

- Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	67.2 mg
Energy Consumption kWh/1000 h	434 kWh

- Luminaire Design Requirements

Bulb Temperature (Max)	260 °C
Cap-Base Temperature (Max)	250 °C


- Product Data

Full product code	871150021143910
Order product name	MASTER HPI Plus 400W/645 BU-P E40 1SL/6
EAN/UPC - Product	8711500211439
Order code	928410600027
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	928410600027
Net Weight (Piece)	390.000 g
ILCOS Code	ME/S-400/45/2A-H-E40-/V

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury or sodium lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

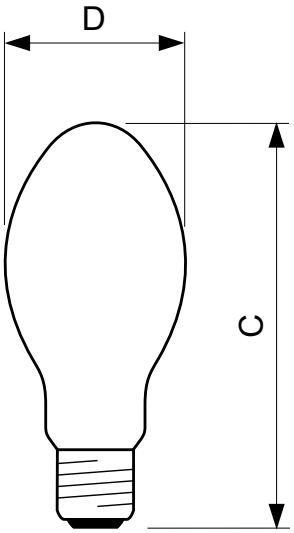


HPI, E40


HPI Plus 400W/645 BU-P E40

Product	D	C
MASTER HPI Plus 400W/645 BU-P E40 1SL/6	117.5 mm	290 mm



Photometric data

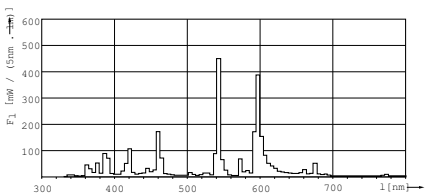

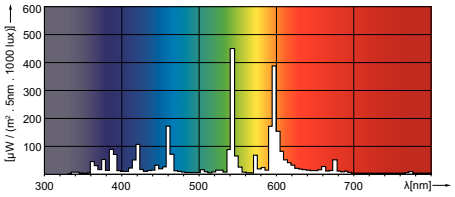

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, March 7
data subject to change