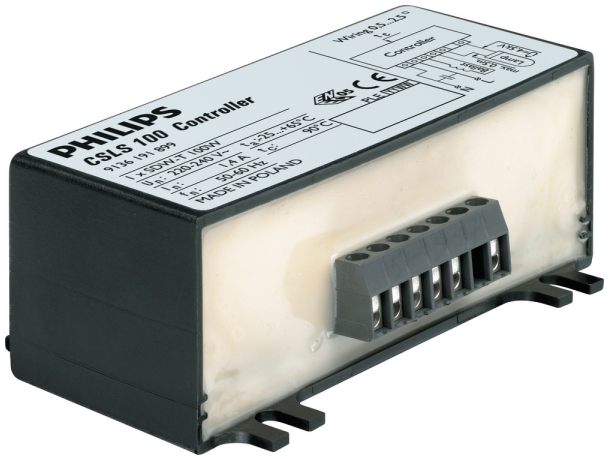


Gear for SDW-T lamps

CSLS 100 SDW-T 220-240V 50/60Hz

CSLS electronic control unit with impregnated (HID 'BASIC') or encapsulated (HID 'Heavy Duty') electromagnetic ballasts

Product data

• General Information

Lamp Type	SDW-T
Number Of Lamps	1 piece/unit

• Operating and Electrical

Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Response Voltage	210 V
Mains Voltage Performance (AC)	-4%-+9%
Mains Voltage Safety (AC)	-10%-+10%
Output Peak Voltage (Max)	4500 V
Power Losses (Nom)	4.0 W

• Wiring

Cable Length From Device To Lamp	0.50 m
Wire Striplength	6.0 mm
Ballast Contact Wire Cross Section	0.50-2.50 mm²
Cable Capacity Output Wires To Earth (Nom)	50 pF
Connector Type	Screw

• System characteristics

Rated Ballast-Lamp Power	100 W

• Temperature

T-Ambient (Max)	65 °C
T-Storage (Max)	80 °C
T-Storage (Min)	-25 °C
T-Case Lifetime (Nom)	90 °C
T-Case Maximum (Max)	90 °C

• Approval and Application

Vibration Standard	IEC 68-2-6 Fc
Approval Marks	CE marking VDE-EMV certificate CB Certificate

• Product Data


Full product code	871150090870430
Order product name	CSLS 100 SDW-T 220-240V 50/60Hz
EAN/UPC - Product	8711500908704
Order code	913619189966
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	18
Material Nr. (12NC)	913619189966
Net Weight (Piece)	0.259 kg

PHILIPS

Warnings and Safety


- Climatic suitability CSLS and HID BASIC: restricted to built in situations under normal conditions
- Climatic suitability CSLS and HID Heavy Duty: use in luminaires under humid conditions (not drip-proof)

Dimensional drawing

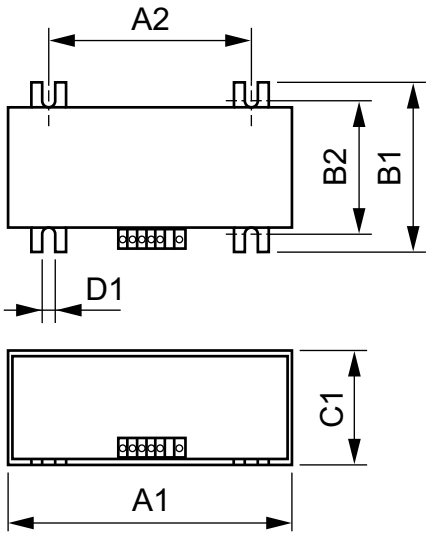

CSLS 100 SDW-T 220-240V 50/60Hz

Product	D1	C1	A1	A2	B1	B2
CSLS 100 SDW-T 220-240V 50/60Hz	4.5 mm	39.5 mm	98.0 mm	70.0 mm	58.5 mm	46.0 mm

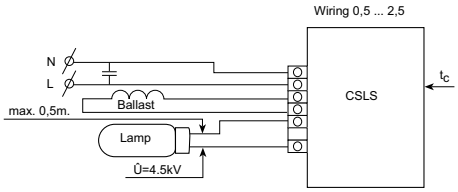

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting