

HID ignitors for series systems

SN D 88 400V 50/60Hz

HID ignitors for series systems

Product data

• General Information

Application Code	88
Lamp Type	GP-SON
Number Of Lamps	1 piece/unit

• Operating and Electrical

Input Voltage	400 V
Input Frequency	50 to 60 Hz
Igniton Type	Semi-Parallel
Ignition Attempts	3
Ignition Time (Max)	1185 s
Ignition Voltage (Max)	5.0 kV
Ignition Voltage (Min)	3.7 kV
Response Voltage	290 V
Mains Voltage Performance (AC)	-8%-+6%
Mains Voltage Safety (AC)	-10%-+10%
Power Losses (Nom)	1.5 W

• Wiring

Ballast Contact Wire Cross Section	0.70-2.50 mm²
Connector Type	Screw

• System characteristics

Rated Ballast-Lamp Power	600 W

• Temperature

T-Ambient (Max)	80 °C
T-Ambient (Min)	-20 °C
T-Case Maximum (Max)	90 °C

• Mechanical and Housing

Housing	SNI-115

• Approval and Application


Approval Marks	CE marking ENEC certificate


• Product Data

Full product code	871150091034940
Order product name	SN D 88 400V 50/60Hz
EAN/UPC - Product	8711500910349
Order code	913700615067
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	120
Material Nr. (12NC)	913700615067
Net Weight (Piece)	0.069 kg

PHILIPS

Dimensional drawing

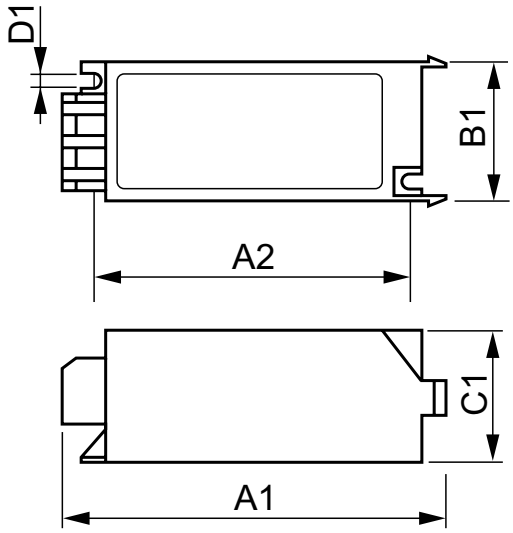

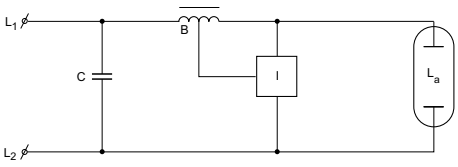

SND 88 400V 50/60Hz

Product	D1	C1	A1	A2	B1
SN D 88 400V 50/60Hz	4.3 mm	38.5 mm	114.5 mm	95.0 mm	41.5 mm

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.