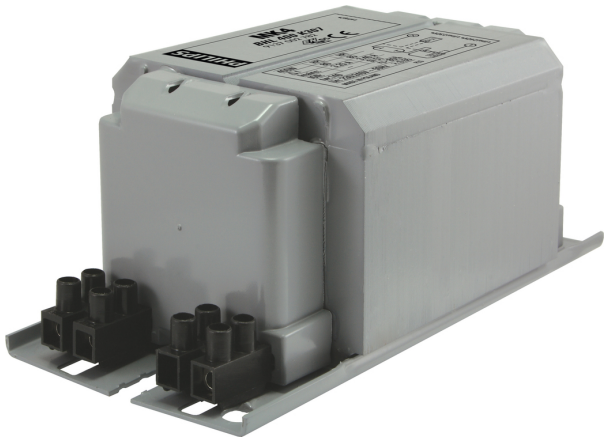


HID-HeavyDuty BHL for HPL/HPI

BHL 250 L40 230V 50Hz HD2-126

Encapsulated electromagnetic copper/iron ballasts for HPL and HPI (Plus) lamps

Product data

• General Information

Application Code	L40
Design	HD2-126
Lamp Type	HPL/HPI
Number Of Lamps	1 piece/unit

• Operating and Electrical

Input Voltage	230 V
Input Frequency	50 Hz
Power Factor 100% Load (Nom)	0.87
Mains Voltage Performance (AC)	-8%-+6%
Mains Voltage Safety (AC)	-10%-+10%
Input Current With PF Correction	1.35 A
Input Current Without PF Correction	2.13 A
Power Factor Without PF Compensation (Nom)	0.55
Power Losses (Nom)	19.5 W

• Wiring

Wire Striplength	7.0 mm
Ballast Contact Wire Cross Section	0.70-6.00 mm²
Connector Type	Screw

• System characteristics

Capacitor	18µF/250V
Rated Ballast-Lamp Power	250 W
Recommended Ignitor	no ignitor for HPL-N for HPI-T ignitor SI51 (913619519966)

• Temperature


T-Storage (Max)	130 °C
T-Storage (Min)	-30 °C
T-Winding (Max)	130 °C
Delta-T Normal Conditions	85 °C

• Product Data

Full product code	871150091950230
Order product name	BHL 250 L40 230V 50Hz HD2-126
EAN/UPC - Product	8711500919502
Order code	91950230
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	913603920426
Net Weight (Piece)	1.840 kg


PHILIPS

Dimensional drawing

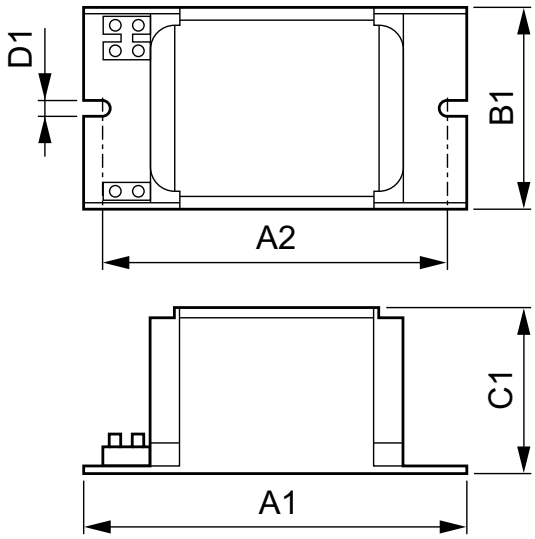

BHL 250 L40 230V 50Hz HD2-126

Product	D1	C1	A1	A2	B1
BHL 250 L40 230V 50Hz HD2-126	6.2 mm	66.0 mm	126.0 mm	107.5 mm	81.0 mm

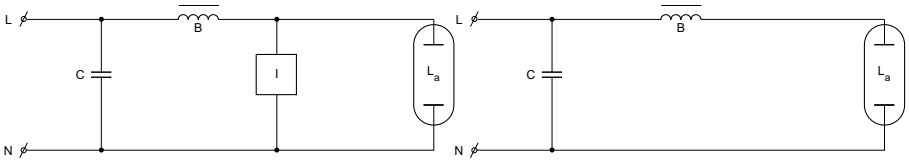

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting