

HID-HighPower for SON/MH/HPL/HPI

BSN 1000 L78 230/240V 50HZ HP-257

Encapsulated ballasts for use with SON (T) (Plus), HPL, HPI and MH lamps with rated wattages of 1000W and above

Product data

• General Information

Application Code	L78
Design	HP-257
Lamp Type	SON
Number Of Lamps	1 piece/unit

• Operating and Electrical

Input Voltage	230 V (default) or 240 V
Input Frequency	50 Hz
Input Voltage (Multi-Tab)	230/240
Power Factor 100% Load (Nom)	0.87
Mains Voltage Performance (AC)	-8%-+6%
Mains Voltage Safety (AC)	-10%-+10%
Input Current With PF Correction	5.40 A
Input Current Without PF Correction	10.30 A
Power Factor Without PF Compensation (Nom)	0.50
Power Losses (Nom)	54.0 W

• Wiring

Wire Striplength	7.0 mm
Ballast Contact Wire Cross Section	0.70-6.00 mm²
Connector Type	Screw

• System characteristics

Capacitor	100µF/250V
Rated Ballast-Lamp Power	1000 W
Recommended Ignitor	only series

• Temperature


T-Storage (Max)	80 °C
T-Storage (Min)	-25 °C
T-Winding (Max)	130 °C
Delta-T Normal Conditions	70 °C

• Product Data

Full product code	871150006236900
Order product name	BSN 1000 L78 230/240V 50Hz HP-257
EAN/UPC - Product	8711500996640
Order code	06236900
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	913700217503
Net Weight (Piece)	12.700 kg


PHILIPS

Dimensional drawing

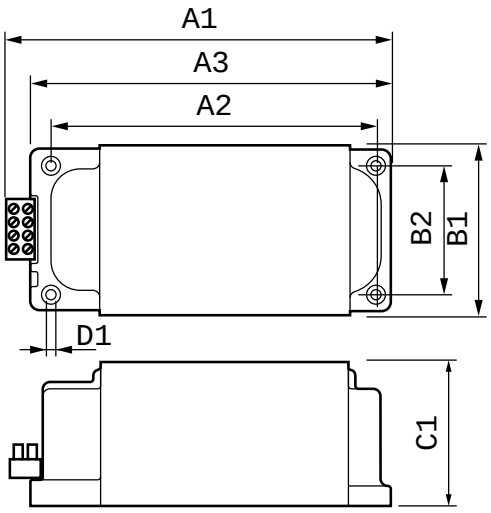


BSN 1000 L78 230/240V 50Hz HP-257

Product	D1	C1	A1	A2	A3	B1	B2
BSN 1000 L78 230/240V 50Hz HP-257	6.5 mm	102.0 mm	257.0 mm	222.0 mm	246.0 mm	117.0 mm	88.0 mm

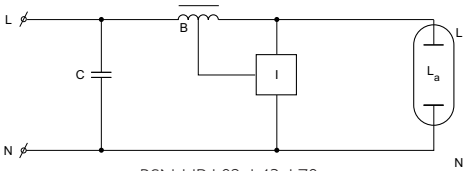

BSN-HP L02, L43, L78

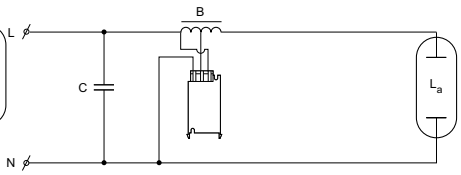

BSN-HP L02, L43, L78

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting