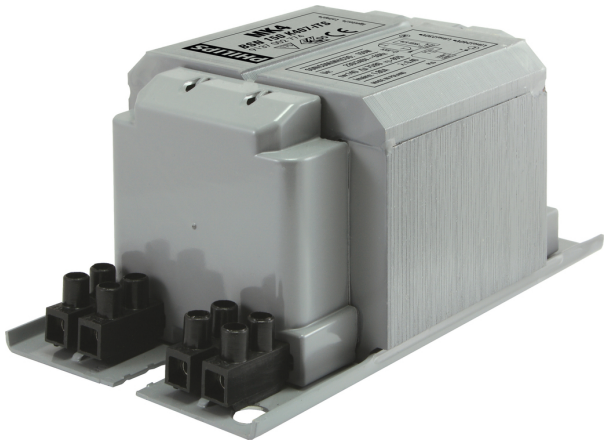


HID-Basic BSN/BMH MK4 semi-parallel for SON/CDO/CDM/MH/HPI

BSN 150 K407-ITS 230/240V 50Hz BC2-134

Impregnated electromagnetic copper ballasts for use with an external semi-parallel ignitor for CDM, CDO, MH, HPI (Plus) and SON lamps

Product data

• General Information

Application Code	K407-ITS
Design	BC2-134
Lamp Type	SON/MH/CDM/CDO
Number Of Lamps	1 piece/unit

• Operating and Electrical

Input Voltage	230 V (default) or 240 V
Input Frequency	50 Hz
Power Factor 100% Load (Nom)	0.85
Mains Voltage Performance (AC)	-8%-+6%
Mains Voltage Safety (AC)	-10%-+10%
Input Current With PF Correction	0.85 A
Input Current Without PF Correction	1.80 A
Power Factor Without PF Compensation (Nom)	0.40
Power Losses (Nom)	19.9/20.6 W

• Wiring

Wire Striplength	7.0 mm
Ballast Contact Wire Cross Section	1.00-2.50 mm²
Connector Type	Screw

• System characteristics

Capacitor	18µF/250V
Rated Ballast-Lamp Power	150 W
Recommended Ignitor	for SON/CDO/CDM lamps ignitor SKD 578 (913700655366)

• Temperature

T-Storage (Max)	130 °C
T-Storage (Min)	-30 °C
T-Winding (Max)	140 °C
Delta-T Normal Conditions	75/80 °C

• Approval and Application

Active Temperature Protection	Yes


• Product Data

Full product code	872790088698600
Order product name	BSN 150 K407-ITS 230/240V 50Hz BC2-134
EAN/UPC - Product	8711500881557
Order code	913700277426
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	913700277426
Net Weight (Piece)	2.235 kg

PHILIPS


HID-Basic BSN/BMH MK4 semi-parallel for SON/CDO/CDM/MH/HPI

Dimensional drawing

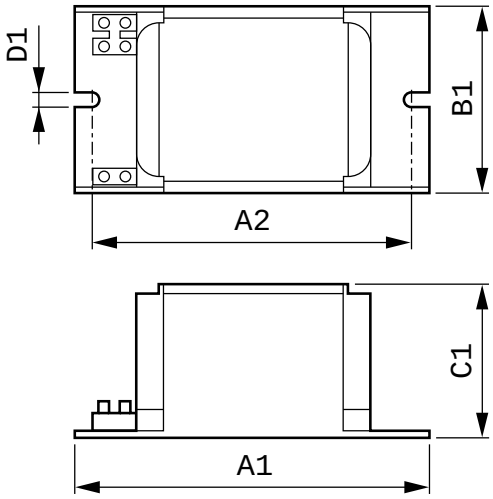

BSN 150 K407-ITS 230/240V 50Hz BC2-134

Product	D1	C1	A1	A2	B1
BSN 150 K407-ITS 230/240V 50Hz BC2-134	6.2 mm	65.0 mm	134.0 mm	113.0 mm	76.0 mm

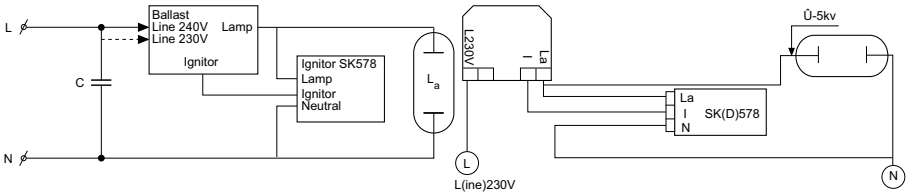

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, March 15
data subject to change