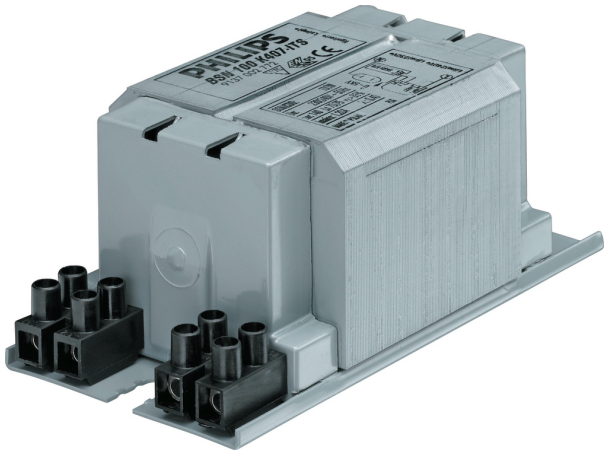


HID-Basic BSN/BMH MK4 semi-parallel for SON/CDO/CDM/MH/HPI

BSN 100 K302-I 230V 50Hz BC1-123

Impregnated electromagnetic copper ballasts for use with an external semi-parallel ignitor for CDM, CDO, MH, HPI (Plus) and SON lamps

Product data

• General Information

Application Code	K302-I
Design	BC1-123
Number Of Lamps	1 piece/unit

• Operating and Electrical

Input Voltage	230 V
Input Frequency	50 Hz
Power Factor 100% Load (Nom)	0.4
Mains Voltage Performance (AC)	-8%-+6%
Mains Voltage Safety (AC)	-10%-+10%
Input Current With PF Correction	0.6 A
Input Current Without PF Correction	1.2 A

• Wiring

Ballast Contact Wire Cross Section	2.5 mm²
Connector Type	Screw

• System characteristics

Capacitor	12µF/250V
Rated Ballast-Lamp Power	100 W
Recommended Ignitor	for SON/CDO/CDM lamps ignitor SKD 578 (913700655366) or series digital SUD40 (913700193591)

• Temperature

T-Storage (Max)	130 °C
T-Storage (Min)	-30 °C
T-Winding (Max)	140 °C
Delta-T Normal Conditions	70 °C

• Approval and Application

Active Temperature Protection	Yes


• Product Data


Full product code	872790094060200
Order product name	BSN 100 K302-I 230V 50Hz BC1-123
EAN/UPC - Product	8727900940602
Order code	94060200
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	913700281726
Net Weight (Piece)	1.385 kg

PHILIPS

HID-Basic BSN/BMH MK4 semi-parallel for SON/CDO/CDM/MH/HPI

Dimensional drawing

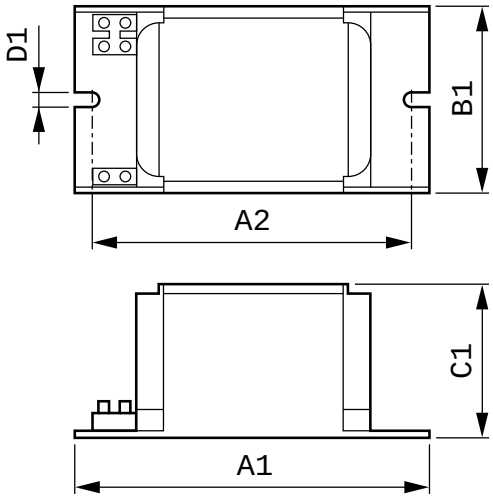

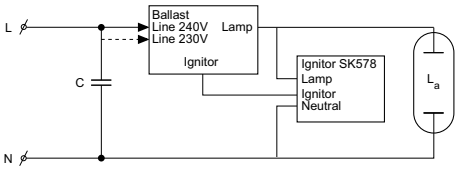

BSN 100 K302-I 230V 50Hz BC1-123

Product	D1	C1	A1	A2	B1
BSN 100 K302-I 230V 50Hz BC1-123	6.2 mm	52.0 mm	123.0 mm	98.0 mm	61.0 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting