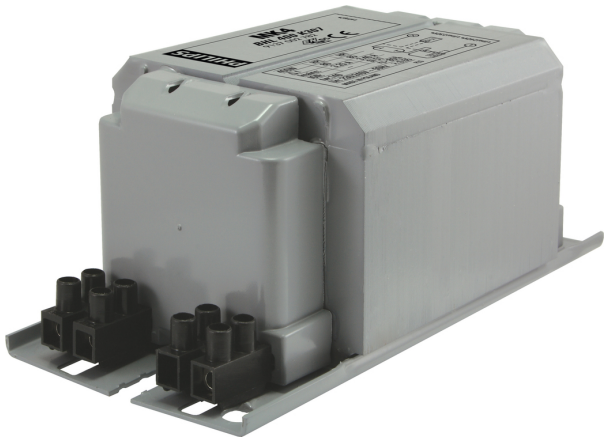


HID-Basic BHL for HPL/HPI

BHL 400 K202 230V 50Hz BC2-151

Impregnated electromagnetic copper/iron ballasts for HPL and HPI (Plus) lamps

Product data

• General Information

Application Code	K202
Design	BC2-151
Lamp Type	HPL/HPI
Number Of Lamps	1 piece/unit

• Operating and Electrical

Input Voltage	230 V
Input Frequency	50 Hz
Power Factor 100% Load (Nom)	2.15
Mains Voltage Performance (AC)	-8%-+6%
Mains Voltage Safety (AC)	-10%-+10%
Input Current With PF Correction	2.15 A
Input Current Without PF Correction	3.25/3.40 A
Power Factor Without PF Compensation (Nom)	3.25

• Wiring

Wire Striplength	7.0 mm
Ballast Contact Wire Cross Section	2.5 mm²
Connector Type	Screw

• System characteristics

Capacitor	45µF/250V
Rated Ballast-Lamp Power	400 W
Recommended Ignitor	no ignitor for HPL-N for HPI-T ignitor SI51 (913619519966)

• Temperature


T-Storage (Max)	130 °C
T-Storage (Min)	-30 °C
T-Winding (Max)	130 °C
Delta-T Normal Conditions	80/85 °C

• Product Data

Full product code	872790094076300
Order product name	BHL 400 K202 230V 50Hz BC2-151
EAN/UPC - Product	8727900940763
Order code	94076300
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	913700284626
Net Weight (Piece)	2.998 kg

PHILIPS

Dimensional drawing

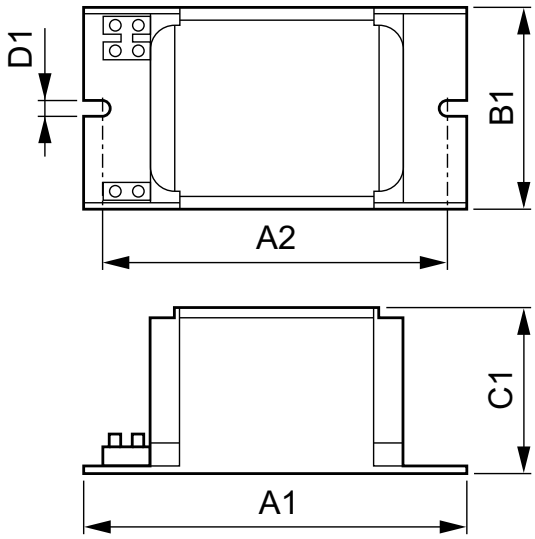



BHL 400 K202 230V 50Hz BC2-151

Product	D1	C1	A1	A2	B1
BHL 400 K202 230V 50Hz BC2-151	6.2 mm	65.0 mm	150.0 mm	129.0 mm	76.0 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting