

PAR56

PAR56 300W GX16d 230V WFL 1CT/6

Extremely powerful pressed-glass 179 mm diameter reflector lamps

Product data

• General Information

Cap-Base	GX16D [GX16d]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	-
Gas Filling	Gas
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Beam Angle (Nom)	40 °
Luminous Flux (Rated) (Nom)	2380 lm
Luminous Intensity (Max)	9000 cd
Beam Description	Wide Flood
Rated Beam Angle	40 °
Correlated Color Temperature (Nom)	2700 K
Color Rendering Index (Nom)	100
Luminous Flux In 90° Cone (Rated)	2380 lm

• Operating and Electrical

Power (Rated) (Nom)	300.0 W
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Approval and Application

Energy Efficiency Label (EEL)	D
Energy Consumption kWh/1000 h	300 kWh


• Product Data

Full product code	871150015965610
Order product name	PAR56 300W GX16d 230V WFL 1CT/6
EAN/UPC - Product	8711500159656
Order code	923804244221
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	923804244221
Net Weight (Piece)	513.000 g
ILCOS Code	IPAR-300-230-GX16d-179/40


PHILIPS

PAR56

Dimensional drawing

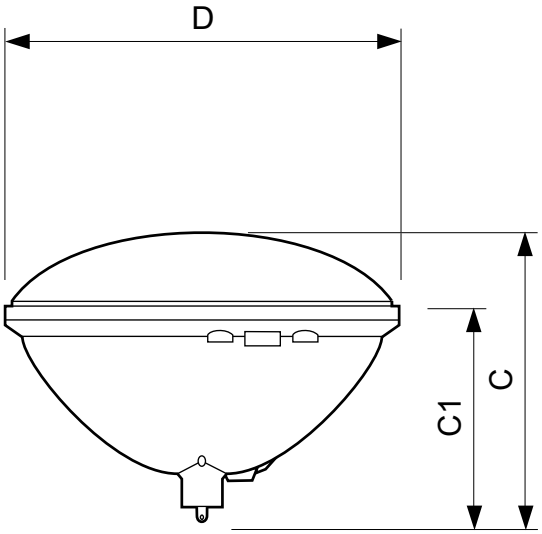

PAR56, GX16d



PAR56 300W GX16d 230V WFL

Product	D	C	C1
PAR56 300W GX16d 230V WFL 1CT/6	178.5 mm	126.9 mm	98 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change