

PAR56

PAR56 300W MULTIPURPOSE 12V UW 1CT/8

Extremely powerful pressed-glass 179 mm diameter reflector lamps

Product data

• General Information

Cap-Base	MULTIPURPOSE [AKA:Screw Terminal]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Underwater
Nominal Lifetime (Nom)	1000 h
Switching Cycle	4000X

• Light Technical

Beam Angle (Nom)	40 °
Luminous Flux (Rated) (Nom)	4378 lm
Luminous Intensity (Max)	16000 cd
Beam Description	-
Rated Beam Angle	40 °
Colour Temperature, horizontal (Nom)	2700 K
Colour Rendering Index horiz (Nom)	100
Luminous Flux In 90° Cone (Rated)	4378 lm

• Operating and Electrical

Power (Rated) (Nom)	300.0 W
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Voltage (Nom)	12 V

• Controls and Dimming

Dimmable	Yes

• Approval and Application


Energy Efficiency Label	C
Energy Consumption kWh/1000 h	318 kWh

• Product Data

Full product code	871150015969442
Order product name	PAR56 300W Multipurpose 12V UW 1CT/8
EAN/UPC - Product	8711500159694
Order code	15969442
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	923804817121
Net Weight (Piece)	580.000 g
ILCOS Code	IPAR-300-12-179/40

PHILIPS

Dimensional drawing

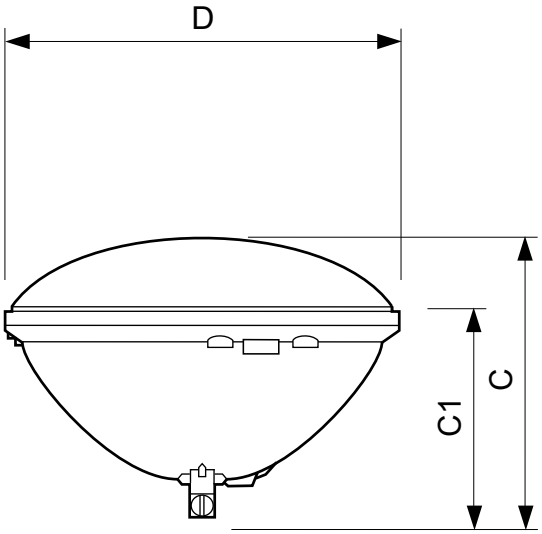

PAR56, UW

PAR56 300W MP 12V UW

Product	D	C	C1
PAR56 300W Multipurpose 12V UW 1CT/8	178.5 mm	119.3 mm	98 mm

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting