

PAR38

PAR38 80W E27 230V SP 12D 1CT/12

Pressed-glass 121 mm diameter reflector lamps of high luminous intensity

Product data

• General Information

Cap-Base	E27
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Beam Angle (Nom)	12 °
Luminous Flux (Rated) (Nom)	655 lm
Luminous Intensity (Max)	4700 cd
Beam Description	Spot
Rated Beam Angle	12 °
Correlated Color Temperature (Nom)	2700 K
Color Rendering Index (Nom)	100
Luminous Flux In 90° Cone (Rated)	655 lm

• Operating and Electrical

Power (Rated) (Nom)	80.0 W
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Approval and Application

Energy Efficiency Label (EEL)	D
Energy Consumption kWh/1000 h	80 kWh


• Product Data

Full product code	871150038075315
Order product name	PAR38 80W E27 230V SP 12D 1CT/12
EAN/UPC - Product	8711500380753
Order code	923810244212
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	923810244212
Net Weight (Piece)	319.000 g
ILCOS Code	IPAR-80-230-E27-121/12

PHILIPS

PAR38

Dimensional drawing

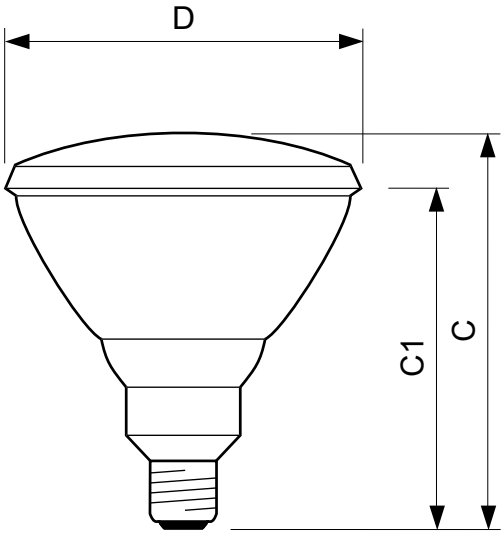

PAR38 E27



PAR38 80W E27 230V SP

Product	D	C
PAR38 80W E27 230V SP 12D 1CT/12	123 mm	137 mm

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, March 3
data subject to change