

PAR38

PAR38 60W E27 230V FL 30D 1CT/12

Pressed-glass 121 mm diameter reflector lamps of high luminous intensity

Product data

• General Information

Cap-Base	E27 [E27]
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Beam Angle (Nom)	30 °
Luminous Flux (Rated) (Nom)	445 lm
Luminous Intensity (Max)	1200 cd
Beam Description	Flood [Flood]
Rated Beam Angle	30 °
Colour Temperature, horizontal (Nom)	2700 K
Colour Rendering Index horiz (Nom)	100
Luminous Flux In 90° Cone (Rated)	445 lm

• Operating and Electrical

Power (Rated) (Nom)	60.0 W
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Eccentricity (Max)	1.0 mm
Skewness (Max)	2.5 mm

• Approval and Application

Energy Efficiency Label	D
Energy Consumption kWh/1000 h	60 kWh


• Product Data

Full product code	871150038063015
Order product name	PAR38 60W E27 230V FL 30D 1CT/12
EAN/UPC - Product	8711500380630
Order code	38063015
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	923810444214
Net Weight (Piece)	319.000 g
ILCOS Code	IPAR-60-230-E27-121/30

PHILIPS

PAR38

Dimensional drawing

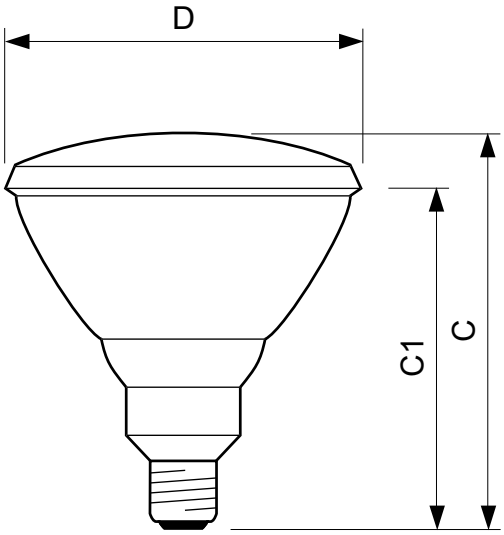

PAR38 E27



PAR38 60W E27 230V FL

Product	D	C	C1
PAR38 60W E27 230V FL 30D 1CT/12	123 mm	137 mm	123 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change