

MASTER TL-D Secura

MASTER TL-D Secura 58W/840 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Product data

- General Information

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	12000 h
Life To 50% Failures (Nom)	15000 h
Life To 50% Failures Preheat (Nom)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	89 %
LSF 16000 h Rated	33 %
LSF 20000 h Rated	2 %

- Light Technical

Colour Code	840 [CCT of 4000K (841)]
Luminous Flux (Nom)	5000 lm
Luminous Flux (Rated) (Nom)	5000 lm
Colour Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	383
Chromaticity Coordinate Y (Nom)	386
Colour Temperature, horizontal (Nom)	4100 K
Luminous Efficacy (rated) (Nom)	85.5 lm/W
Colour Rendering Index horiz (Nom)	85
Depreciation 2000 hrs	96 %
LLMF 4000 h Rated	95 %
Depreciation 5000 hrs	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

- Operating and Electrical

Power (Rated) (Nom)	58.5 W
Lamp Current (Nom)	0.670 A

- Temperature

Design Temperature (Nom)	25 °C

- Controls and Dimming

Dimmable	Yes

- Approval and Application

Energy Efficiency Label	A
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	68 kWh

- UV

Damage Factor D/fc (Nom)	0.13

PHILIPS

MASTER TL-D Secura

- Product Data

Full product code	871150064018540
Order product name	MASTER TL-D Secura 58W/840 SLV/25
EAN/UPC - Product	8711500640185
Order code	64018540
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927922484076
Net Weight (Piece)	243.100 g
ILCOS Code	FD-58/40/1B-E-G13


Warnings and Safety

- Not suitable for closed luminaires (as indicated by two blue rings)
- Recommended use in combination with self-stopping lamp control system
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- It's strongly recommended to replace Secura lamps before or at the moment the specified lamp life (50% failures @ 3 hrs switching cycle) is reached.


Dimensional drawing

TL-D 58W/840 Secura


Product	D	A	B	B	C
MASTER TL-D Secura 58W/840 SLV/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm

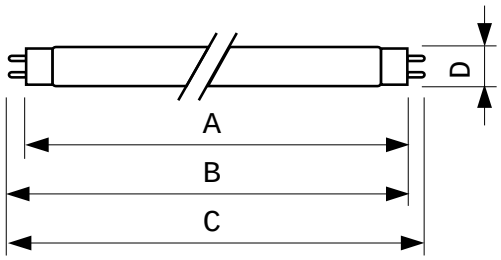


G13, T8



Photometric data

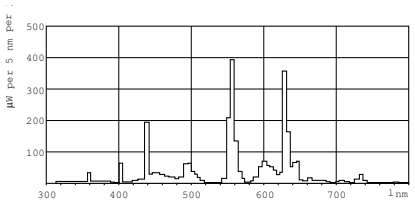

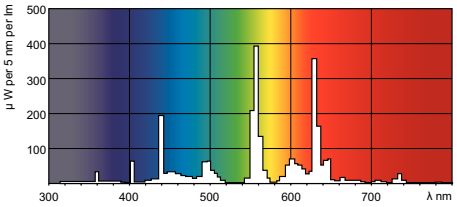

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting