

TL-M Rapid Start Standard Colours

TL-M RS 20W/33-640 SLV/25

The TL-M RS (Rapid Start) lamp (tube diameter 38 mm) has an external silicon coating and an external ignition strip. It is suitable for situations where low temperatures and high humidity require fast and stable ignition but color rendering is not important. Rapid Start lamps can be ignited without a starter.

Product data

• General Information

Cap-Base	G13 [G13 Medium Bi-Pin Fluorescent]
Life To 50% Failures (Nom)	13000 h
System Description	Rapid Start

• Light Technical

Color Code	33-640
Luminous Flux (Nom)	1200 lm
Color Designation	Cool White (CW)
Lumen Maintenance 10000 h (Nom)	73 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	81 %
Chromaticity Coordinate X (Nom)	377
Chromaticity Coordinate Y (Nom)	381
Correlated Color Temperature (Nom)	4100 K
Luminous Efficacy (rated) (Nom)	62 lm/W
Color Rendering Index (Nom)	63

• Operating and Electrical

Power (Rated) (Nom)	19.3 W
Lamp Current (Nom)	0.37 A
Voltage (Nom)	57 V

• Controls and Dimming

Dimmable	Yes

• Approval and Application

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Nom)	8.0 mg
Energy Consumption kWh/1000 h	24 kWh

• Product Data

Full product code	871150072372740
Order product name	TL-M RS 20W/33-640 SLV/25
EAN/UPC - Product	8711500723727
Order code	928030003371
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928030003371
Net Weight (Piece)	137.800 g
ILCOS Code	FD-20/41/2B-LC/P-G13


PHILIPS

TL-M Rapid Start Standard Colours

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

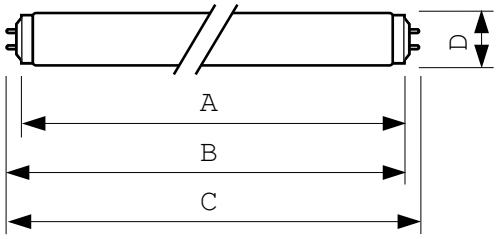


TL-M 20W/33-640 RS


Product	D	A	B	B	C
TL-M RS 20W/33-640 SLV/25	40.5 mm	589.8 mm	596.9 mm	594.5 mm	604.0 mm

G13, T12



Photometric data

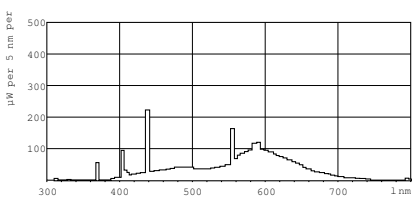

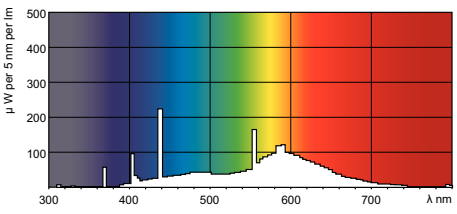

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, January 18
data subject to change