

TL-M Rapid Start Standard Colours

TL-M RS 40W/54-765 1SL/25

Low-pressure mercury discharge lamps with a tubular 38 mm envelope

Product data

• General Information

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life To 50% Failures (Nom)	13000 h
System Description	Rapid Start (RS)

• Light Technical

Colour Code	54-765
Luminous Flux (Nom)	2500 lm
Colour Designation	Cool Daylight
Lumen Maintenance 10000 h (Nom)	73 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	81 %
Chromaticity Coordinate X (Nom)	315
Chromaticity Coordinate Y (Nom)	341
Colour Temperature, horizontal (Nom)	6200 K
Luminous Efficacy (rated) (Nom)	63 lm/W
Colour Rendering Index horiz (Nom)	72

• Operating and Electrical

Power (Rated) (Nom)	39.5 W
Lamp Current (Nom)	0.430 A
Voltage (Nom)	101 V

• Controls and Dimming

Dimmable	Yes

• Approval and Application

Energy Efficiency Label	B
Mercury (Hg) Content (Nom)	8.0 mg
Energy Consumption kWh/1000 h	47 kWh

• Product Data

Full product code	871150072441040
Order product name	TL-M RS 40W/54-765 1SL/25
EAN/UPC - Product	8711500724410
Order code	72441040
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928030505471
Net Weight (Piece)	275.600 g
ILCOS Code	FD-40/62/2A-LC/P-G13


PHILIPS

TL-M Rapid Start Standard Colours

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

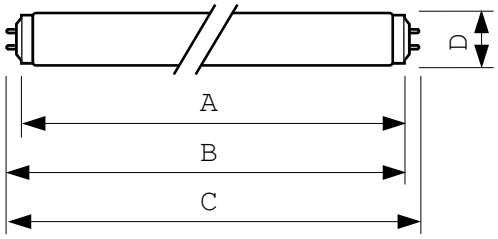


TL-M 40W/54-765 RS


Product	D	A	B	B	C
TL-M RS 40W/54-765 1SL/25	40.5 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

G13, T12



Photometric data

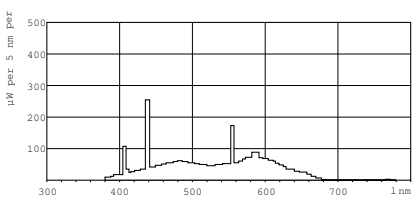

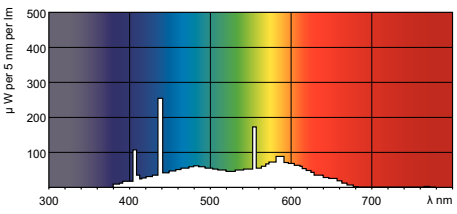

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change