

MASTERLine ES

MASTERLine ES 30W GU5.3 12V 8D 1CT/4X5F

Low-voltage halogen burner with very high energy efficiency and long lifetime thanks to IRR coating in glass reflector. Ideal solution for small decorative luminaires, putting your objects in the spotlight. Dichroic coating prevents heat transmission onto the object.

PHILIPS

MASTERLine ES

Product data

- General Information

Cap-Base	GU5.3 [GU5.3]
Philips Code	18134
Operating Position	UNIVERSAL [Any or Universal (U)]
ANSI Code Halogen	-
Nominal Lifetime (Nom)	5000 h
Switching Cycle	20000X

- Light Technical

Beam Angle (Nom)	8 °
Luminous Flux (Rated) (Nom)	524 lm
Luminous Intensity (Max)	11000 cd
Rated Beam Angle	8 °
Correlated Color Temperature (Nom)	3000 K
Color Rendering Index (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %
Luminous Flux In 90° Cone (Rated)	524 lm

- Operating and Electrical

Power (Rated) (Nom)	30.0 W
Lamp Current (Nom)	3 A
Wattage Equivalent	49 W
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	12 V

- Controls and Dimming

Dimmable	Yes

- Approval and Application

Energy Efficiency Label (EEL)	B
Energy Consumption kWh/1000 h	32 kWh


- Luminaire Design Requirements

Bulb Temperature (Max)	380 °C
Cap-Base Temperature (Max)	350 °C

- Product Data

Full product code	871150041370371
Order product name	MASTERLine ES 30W GU5.3 12V 8D 1CT/4X5F
EAN/UPC - Product	8711500413703
Order code	924895117101
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	20
Material Nr. (12NC)	924895117101
Net Weight (Piece)	30.000 g
ILCOS Code	HRGS-30-12-GU5.3-50/8

Dimensional drawing

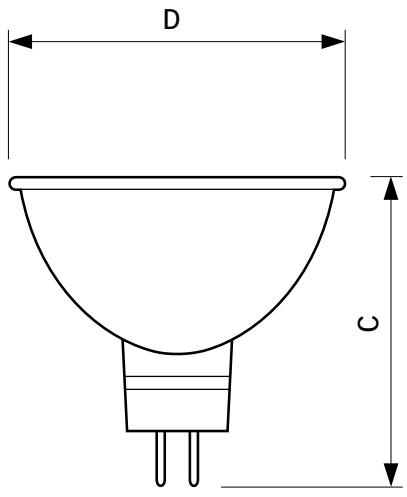


GU5.3, MR16

MLES 18134 30W GU5.3 12V MR16 8D

Product	D	C1
MASTERLine ES 30W GU5.3 12V 8D 1CT/4X5F	51 mm	50.5 mm

Dimensional drawing



© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.