

Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL TL 40W/10 SLV/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Product data

• General Information

Cap-Base	G13 [G13 Medium Bi-Pin Fluorescent]
Main Application	Reprography (R)
Life To 50% Failures (Nom)	9000 h
Useful Life (Nom)	5000 h
System Description	Rapid Start

• Light Technical

Color Code	10
Color Designation	Actinic
Chromaticity Coordinate X (Nom)	222
Chromaticity Coordinate Y (Nom)	210
LLMF 2000 h Rated	20 %
LLMF 6000 h Rated	40 %

• Operating and Electrical

Power (Rated) (Nom)	39 W
Lamp Current (Nom)	0.43 A
Voltage (Nom)	101 V

• Approval and Application

Mercury (Hg) Content (Nom)	13.0 mg

• UV

UV-B/UV-A (IEC)	0.2 %
UV-A Radiation 100Hr (IEC)	10.0 W
UV-A Radiation 0Hr (IEC)	12.4 W

• Product Data

Full product code	871150026026000
Order product name	Actinic BL TL TL 40W/10 SLV/25
EAN/UPC - Product	8711500260260
Order code	928011301020
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928011301020
Net Weight (Piece)	292.000 g

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


PHILIPS


Actinic BL TL(-K)/TL-D(-K)

Dimensional drawing


TL 40W/10 RS


Product	D	A	B	B	C
Actinic BL TL TL 40W/10 SLV/25	40.5 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

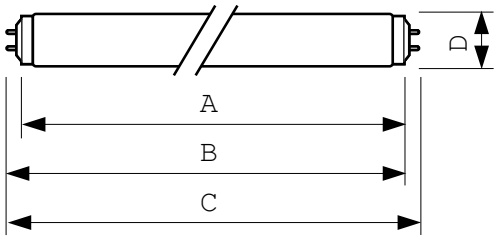



Photometric data

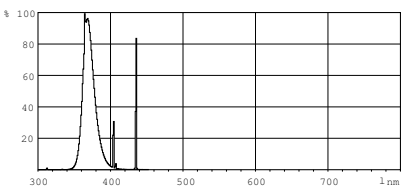

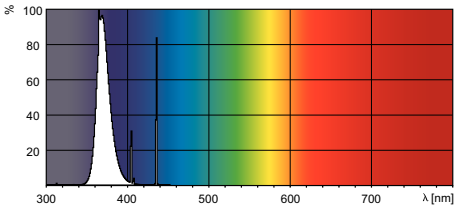

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 24
data subject to change