



Actinic BL TL-D(K) Secura

Actinic BL TL-D TL-DK Secura 36W/10 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL-D(K) Secura lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

Product data

• General Information

Cap-Base	G13 [G13 Medium Bi-Pin Fluorescent]
Main Application	Reprography (R)
Life To 50% Failures (Nom)	9000 h
Useful Life (Nom)	5000 h

• Light Technical

Color Code	10
Color Designation	Actinic
Chromaticity Coordinate X (Nom)	225
Chromaticity Coordinate Y (Nom)	230
LLMF 2000 h Rated	20 %
LLMF 6000 h Rated	30 %

• Operating and Electrical

Power (Rated) (Nom)	36 W
Lamp Current (Nom)	0.865 A
Voltage (Nom)	50 V

• Approval and Application

Mercury (Hg) Content (Nom)	8.0 mg

• UV

UV-B/UV-A (IEC)	0.2 %
UV-A Radiation 100Hr (IEC)	8.8 W

• Product Data

Full product code	872790086085600
Order product name	Actinic BL TL-D TL-DK Secura 36W/10 1SL/25
EAN/UPC - Product	8727900860856
Order code	928019801003
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928019801003
Net Weight (Piece)	127.500 g

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


PHILIPS


Actinic BL TL-D(K) Secura

Dimensional drawing


TL-DK Secura 36W/10


Product	D	A	B	B	C
Actinic BL TL-D TL-DK Secura 36W/10 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

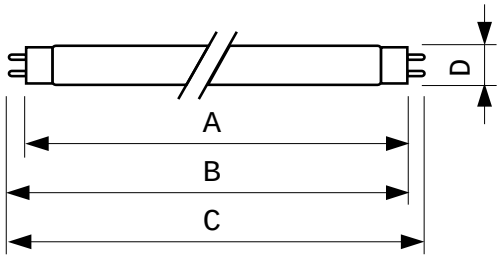



Photometric data

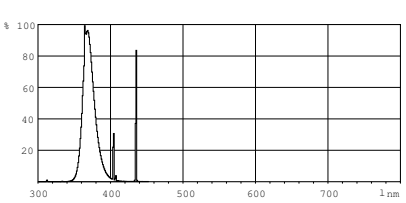

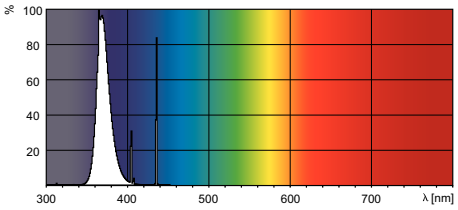

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 24
data subject to change