

Halogen Clickline G9

Halogen MV Caps 42W G9 230V CL 1BC/10

Ideal solution for small decorative luminaires. UV-block glass and safety fuse allow usage without cover glass. The compact Clickline gives crisp white light over a long lifetime.

Product data

• General Information

Cap-Base	G9 [G9]
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Luminous Flux (Nom)	630 lm
Luminous Flux (Rated) (Nom)	630 lm
Correlated Color Temperature (Nom)	2800 K
Luminous Efficacy (rated) (Nom)	15 lm/W
Color Rendering Index (Nom)	100
LLMF At End Of Nominal Lifetime (Min)	80 %

• Operating and Electrical

Power (Rated) (Nom)	42.0 W
Lamp Current (Nom)	0.18 A
Wattage Equivalent	60 W
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Bulb Finish	Clear

• Approval and Application

Energy Efficiency Label (EEL)	D
Energy Consumption kWh/1000 h	42 kWh

• Luminaire Design Requirements

Bulb Temperature (Max)	950 °C
Pinch Temperature (Max)	350 °C


• Product Data

Full product code	872790025291025
Order product name	Halogen MV Caps 42W G9 230V CL 1BC/10
EAN/UPC - Product	8727900252910
Order code	925640844202
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	925640844202
Net Weight (Piece)	3.300 g


PHILIPS

Halogen Clickline G9

Dimensional drawing

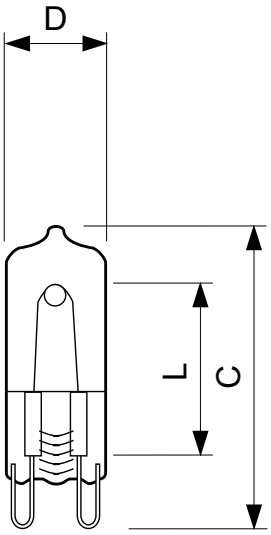

G9



CLICKLINE 42W G9 230V CL

Product	D	L	C
Halogen MV Caps 42W G9 230V CL 1BC/10	13 mm	21.7 mm	45 mm

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, February 22
data subject to change