

HID-Constant wattage BSX for SOX

BSX 55 H26 220-230V 50Hz CW-173/44

Constant-wattage (potted) electromagnetic copper/iron ballasts for use with an external ignitor for SOX and SOX-E lamps

Product data

• General Information

Application Code	H26
Design	CW-173/44
Lamp Type	SOX-E
Number Of Lamps	1 piece/unit

• Operating and Electrical

Input Voltage	220 to 230 V
Input Frequency	50 Hz
Mains Voltage Performance (AC)	-8%-+6%
Mains Voltage Safety (AC)	-10%-+10%
Power Losses (Nom)	19.5 W

• Wiring

Wire Striplength	6.0 mm
Ballast Contact Wire Cross Section	0.75-2.50 mm²
Connector Type	Screw

• System characteristics

Capacitor	5.7µF/450V
Rated Ballast-Lamp Power	55 W
Recommended Ignitor	ignitor SX72

• Temperature

T-Storage (Max)	80 °C
T-Storage (Min)	-25 °C
T-Winding (Max)	130 °C
Delta-T Normal Conditions	70 °C


• Product Data

Full product code	871150091996099
Order product name	BSX 55 H26 220-230V 50Hz CW-173/44
EAN/UPC - Product	8711500919960
Order code	913653000326
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	913653000326
Net Weight (Piece)	1.700 kg

PHILIPS


HID-Constant wattage BSX for SOX

Dimensional drawing

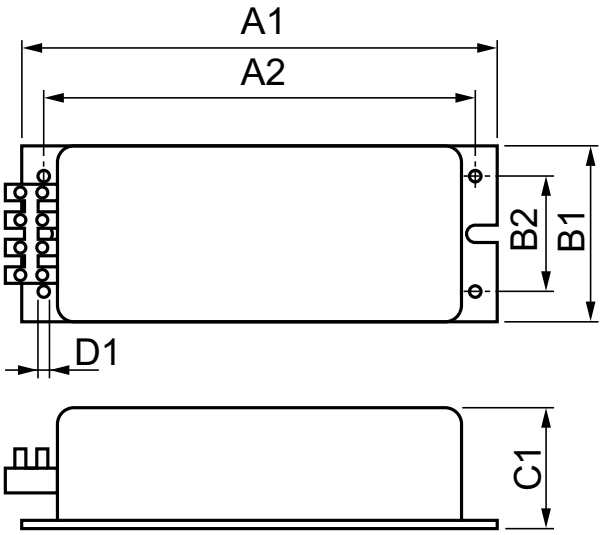

BSX 55 H26 220-230V 50Hz CW-173/44

Product	D1	C1	A1	A2	B1	B2
BSX 55 H26 220-230V 50Hz CW-173/44	4.2 mm	44.0 mm	173.0 mm	157.0 mm	64.0 mm	42.0 mm

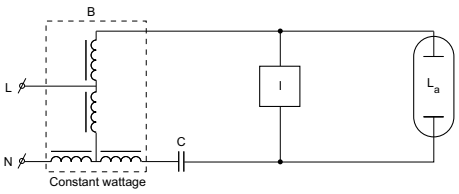

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting