

Halogen High Voltage DE

PF801 R 1000W R7s 230V 1CT/10

The high, constant light output and consistent color temperature of these double ended high voltage halogen lamps ensure attractive, accurately exposed pictures for both film and video. In addition, the wide choice of dimensions and power ratings opens new levels of creative freedom for the luminaire designer.

Product data

• General Information

Cap-Base	R7S [R7s]
Philips Code	PF801 R
ANSI Code	FDG
LIF Code	P1/12
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Video/Photo/Eng
Life To 50% Failures (Nom)	15 h

• Light Technical

Luminous Flux (Rated) (Nom)	34000 lm
Correlated Color Temperature (Nom)	3400 K

• Operating and Electrical

Power (Rated) (Nom)	1000 W
Rapid Acting HBC Fuse	6.3 V
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Bulb Finish	Clear
Filament Shape	Coiled Coil

• Luminaire Design Requirements

Bulb Temperature (Max)	900 °C
Pinch Temperature (Max)	450 °C


• Product Data

Full product code	871150049199225
Order product name	PF801 R 1000W R7s 230V 1CT/10
EAN/UPC - Product	8711500491992
Order code	923862743201
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	923862743201
Net Weight (Piece)	0.011 kg


PHILIPS

Halogen High Voltage DE

Dimensional drawing

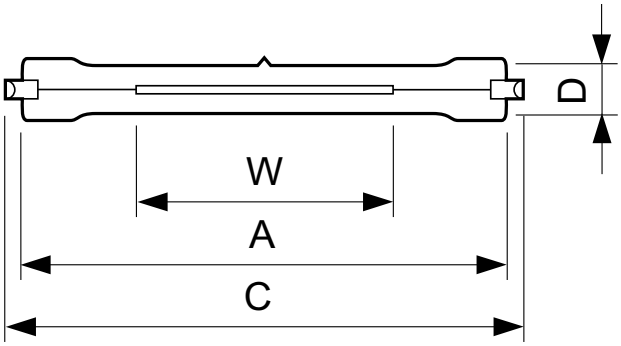

R7s, RX7s



PF801 R 1000W R7s 230V

Product	D	W	A	C
PF801 R 1000W R7s 230V 1CT/10	9 mm	72 mm	121.7 mm	125.1 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 22
data subject to change