

Halogen reflector

DDL 150W 20V 24PK

Philips' halogen reflector lamps offer the ideal no-fuss solution for a wide variety of medical, projection and scientific illumination systems. Their proven reliability makes them ideal for retrofit installations. The burners are precisely aligned for optimal light performance. Dichroic reflectors ensure heat dissipation towards the back of the optical system, which helps the optical system remain within temperature limits. A special blue-filter version blocking out unwanted light above 700 nm is available for dental curing applications. In addition, you get all the proven advantages of halogen technology such as a CRI of 100 – the same as natural sunlight for the best possible color rendering. Halogen lamps also create a comfortable warm white light, and they maintain their high lumen output with almost no lumen reduction throughout their lifetime.

Product data

• General Information

Cap-Base	GX5.3 [GX5.3]
Philips Code	14501
ANSI Code	DDL
LIF Code	-
Operating Position	S105 [s105]
Main Application	Projection
Life To 50% Failures (Nom)	500 h
J Code	-

• Light Technical

Luminous Flux (Rated) (Nom)	400 lm
Correlated Color Temperature (Nom)	3150 K
Color Rendering Index (Nom)	100

• Operating and Electrical

Power (Rated) (Nom)	150 W
Voltage (Nom)	20 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Cap-Base Information	-
Bulb Material	Quartz-UV Open
Reflector Finish	Facetted
Filament Shape	-
Filament Dimensions WxH	-

• Luminaire Design Requirements

Bulb Temperature (Max)	900 °C
Pinch Temperature (Max)	350 °C
Working Distance WD	165 mm

• Product Data

Full product code	871150041061030
Order product name	DDL 150W 20V 24PK
EAN/UPC - Product	8711500410610
Order code	923921419794
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	24


PHILIPS

Halogen reflector


Material Nr. (12NC) 923921419794

Net Weight (Piece) 0.026 kg

Dimensional drawing

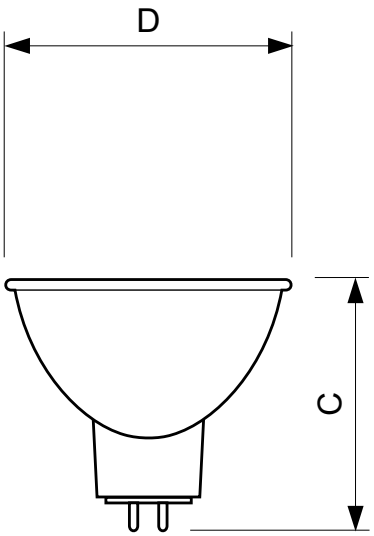

GX5.3, GY5.3, GZ6.35



14501 150W GX5.3 20V

Product	D	C
DDL 150W 20V 24PK	50.67 mm	44.45 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 24
data subject to change