

Hi-Brite

7009Z 1200W G22 80V 1CT

The compact, shock-resistant design of the Hi-Brite lamp series makes it easy to handle and ideal for moving head systems. Also, the compact filament ensures a high beam intensity, which can be used to reduce energy consumption: for example, 1200W can now be used instead of 2500W. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures in any burning position, which further extends lamp lifetime, reduces lamp replacement costs and ensures consistency of high-quality light output.

Product data

• General Information

Cap-Base	G22 [G22]
Philips Code	7009Z
ANSI Code	-
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Entertainment
Life To 50% Failures (Nom)	200 h
System Description	P3 Technology

• Light Technical

Luminous Flux (Rated) (Nom)	36000 lm
Correlated Color Temperature (Nom)	3250 K
Color Rendering Index (Nom)	-

• Operating and Electrical

Power (Rated) (Nom)	1200 W
Voltage (Nom)	80 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Bulb Finish	Clear
Filament Shape	Bi-Plane
Filament Dimensions WxH	11.7x10.2

• Luminaire Design Requirements


Pinch Temperature (Max)	500 °C

• Product Data


Full product code	871150049309525
Order product name	7009Z 1200W G22 80V 1CT
EAN/UPC - Product	8711500493095
Order code	924569028928
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	924569028928
Net Weight (Piece)	0.095 kg

PHILIPS

Dimensional drawing

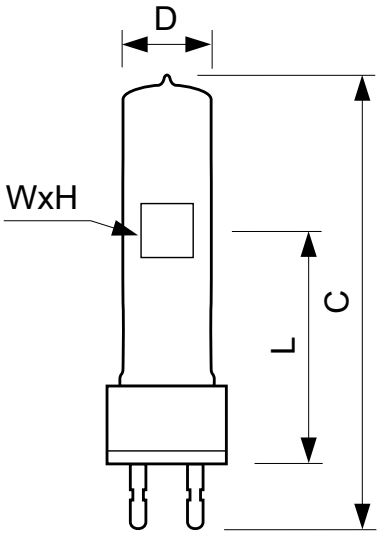

6980Z, 7009Z



7009Z 1200W G22 80V

Product	D	H	W	L	C
7009Z 1200W G22 80V 1CT	25 mm	10.2 mm	11.7 mm	72.5 mm	140 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting