

Hi-Brite

7015TXO 750W GX9.5 100V 1CT/10

The compact, shock-resistant design of the Hi-Brite lamp series makes it easy to handle and ideal for moving head systems. Also, the compact filament ensures a high beam intensity, which can be used to reduce energy consumption: for example, 1200W can now be used instead of 2500W. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures in any burning position, which further extends lamp lifetime, reduces lamp replacement costs and ensures consistency of high-quality light output.

Product data

• General Information

Cap-Base	GX9.5 [GX9.5]
Philips Code	7015TXO
ANSI Code	-
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Entertainment
Life To 50% Failures (Nom)	300 h
System Description	P3 Technology

• Light Technical

Luminous Flux (Rated) (Nom)	20250 lm
Correlated Color Temperature (Nom)	3200 K
Color Rendering Index (Nom)	-

• Operating and Electrical

Power (Rated) (Nom)	750 W
Voltage (Nom)	100 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Bulb Finish	Clear
Filament Shape	Bi-Plane
Filament Dimensions WxH	-

• Luminaire Design Requirements


Pinch Temperature (Max)	500 °C

• Product Data


Full product code	871150050557625
Order product name	7015TXO 750W GX9.5 100V 1CT/10
EAN/UPC - Product	8711500505576
Order code	924574530928
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	924574530928
Net Weight (Piece)	0.037 kg

PHILIPS

Dimensional drawing

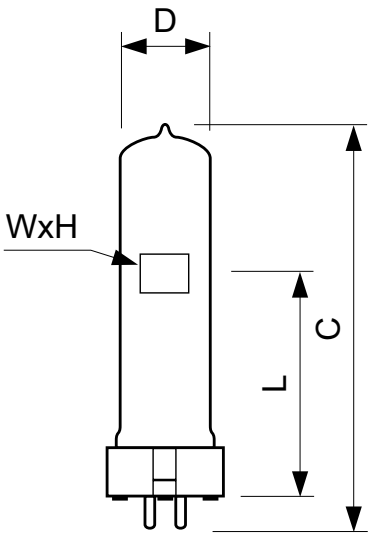

7015 TXO



7015TXO 750W GX9.5 100V

Product	D	H	W	L	C
7015TXO 750W GX9.5 100V 1CT/10	19 mm	8.5 mm	9.5 mm	55 mm	104 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting