

PAR56 and PAR64

PAR64 1000W 240V MFL

These self-contained spotlights are ideal for intensifying the visual experience in all kinds of clubs, that is because their accurate beam control picks out even the smallest of details even over long distances. This beam control makes the PAR 56 and PAR 64 excellent for long-range light projections. In addition, the universal burning feature provides complete flexibility of luminaires angle and position, while the front glass of the PAR56 provides thermal and physical protection. The result? Complete creative freedom to achieve the desired effect. Immediate re-strike also ensures instant resumption of entertainment after any power interruption.

Product data

• General Information

Cap-Base	GX16D [GX16d]
ANSI Code	EXE
LIF Code	CP62
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Flood and Ambient Lighting
Gas Filling	Gas
Life To 50% Failures (Min)	300 h
Nominal Lifetime (Nom)	300 h

• Light Technical

Beam Angle (Nom)	23 °
Luminous Intensity (Max)	130000 cd
Beam Description	Medium Flood
Correlated Color Temperature (Nom)	3200 K

• Operating and Electrical

Power (Rated) (Nom)	1000 W
Voltage (Nom)	240 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing


Cap-Base Information	-

• Product Data

Full product code	871150044076110
Order product name	PAR64 1000W 240V MFL
EAN/UPC - Product	8711500440761
Order code	924783445504
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	924783445504
Net Weight (Piece)	0.760 kg

PHILIPS


Dimensional drawing

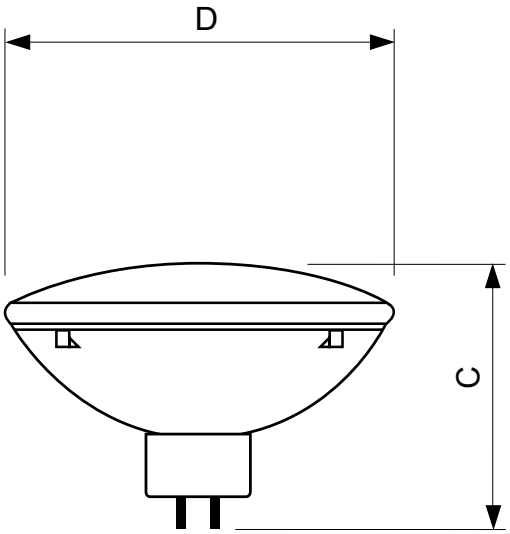

PAR56 and PAR64

PAR64 1000W 240V MFL

Product	D	C
PAR64 1000W 240V MFL	204 mm	150 mm



© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting