

PAR56 and PAR64

Par56 WFL 300W 240V GX16d.1CT/6

These self-contained spotlights are ideal for intensifying the visual experience in all kinds of clubs, that is because their accurate beam control picks out even the smallest of details even over long distances. This beam control makes the PAR 56 and PAR 64 excellent for long-range light projections. In addition, the universal burning feature provides complete flexibility of luminaires angle and position, while the front glass of the PAR56 provides thermal and physical protection. The result? Complete creative freedom to achieve the desired effect. Immediate re-strike also ensures instant resumption of entertainment after any power interruption.

Product data

• General Information

Cap-Base	GX16D [GX16d]
ANSI Code	-
LIF Code	-
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Flood and Ambient Lighting
Life To 50% Failures (Min)	2000 h
Nominal Lifetime (Nom)	2000 h

• Light Technical

Beam Angle (Nom)	40 °
Luminous Intensity (Max)	10000 cd
Beam Description	Wide Flood
Correlated Color Temperature (Nom)	2000 K

• Operating and Electrical

Power (Rated) (Nom)	300 W
Voltage (Nom)	240 V

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Cap-Base Information	-

• Approval and Application


Energy Efficiency Label (EEL)	-

• Product Data


Full product code	871150044196610
Order product name	Par56 WFL 300W 240V GX16d. 1CT/6
EAN/UPC - Product	8711500441966
Order code	924783745504
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	924783745504
Net Weight (Piece)	0.542 kg

PHILIPS

Dimensional drawing

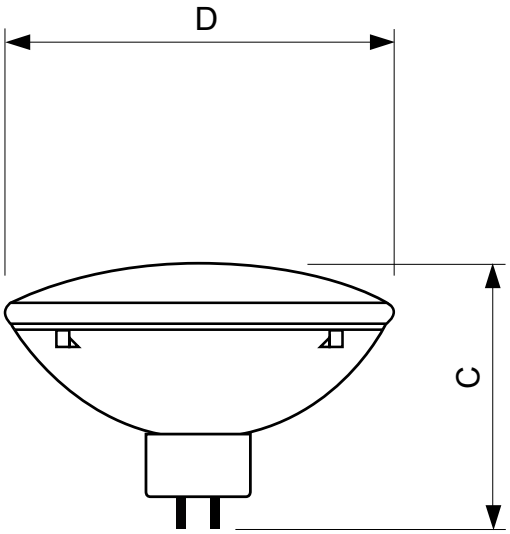

PAR56 and PAR64



PAR56 300W 240V WFL

Product	D	C
Par56 WFL 300W 240V GX16d.1CT/6	178 mm	127 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting