

MASTER TL-D Xtreme Secura

MASTER TL-D Xtreme Secura 36W/840 SLV/25

This TL-D Xtreme lamp has a protective coating that keeps glass and lamp components together in the event of accidental breakage. The lamp is easily identifiable by a blue ring at one end. Application areas are all places where glass shatters can disturb operations and can have an impact on product and people safety, e.g. the food and beverage industry. The lamp has a Teflon coating . It is compliant with HACCP regulations.

Product data

• General Information

Cap-Base	G13 [G13 Medium Bi-Pin Fluorescent]
Life To 50% Failures (Nom)	47000 h
Life To 50% Failures Preheat (Nom)	79000 h
LSF 2000 h Rated	100 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	99 %
LSF 20000 h Rated	99 %

• Light Technical

Color Code	840 [CCT of 4000K (841)]
Luminous Flux (Nom)	3250 lm
Luminous Flux (Rated) (Nom)	3250 lm
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	383
Chromaticity Coordinate Y (Nom)	379
Correlated Color Temperature (Nom)	4100 K
Luminous Efficacy (rated) (Nom)	90 lm/W
Color Rendering Index (Nom)	85
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

• Operating and Electrical

Power (Rated) (Nom)	36.0 W
Lamp Current (Nom)	0.430 A

• Temperature

Design Temperature (Nom)	25 °C

• Controls and Dimming

Dimmable	Yes

• Mechanical and Housing

Cap-Base Information	Green Plate

• Approval and Application

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	3.0 mg
Energy Consumption kWh/1000 h	42 kWh

• Product Data

Full product code	871150088979940
Order product name	MASTER TL-D Xtreme Secura 36W/840 SLV/25

PHILIPS

MASTER TL-D Xtreme Secura


EAN/UPC - Product	8711500889799
Order code	927982784074
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25

Material Nr. (12NC)	927982784074
Net Weight (Piece)	249.900 g
ILCOS Code	FD-36/40/1B-E-G13

Warnings and Safety

- To achieve published lifetimes for 100% operation, do not dim below 30%
- When used on electromagnetic gear, it is strongly recommended to apply only Philips S10 or S10E starters (for 18W types S2 or S2E) to achieve the published lifetimes, and to install new starters when relamping.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- In order to ensure the integrity of the coating, it is strongly recommended to replace Secura lamps before or at the moment the specified lamp life (50% failures @ 3 hrs switching cycle) is reached.


Dimensional drawing

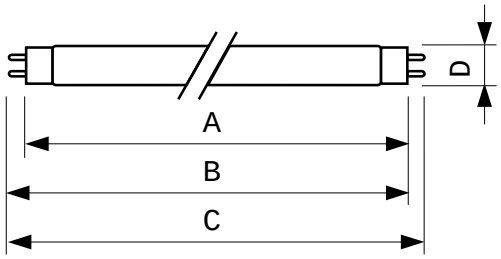


TL-D Xtreme Secura 36W/840


Product	D	A	B	B	C
MASTER TL-D Xtreme Secura 36W/840 SLV/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

G13, T8/T12



Photometric data

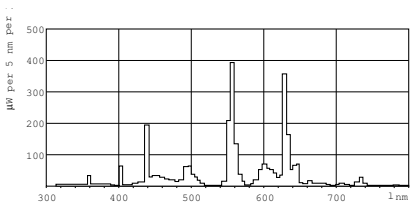

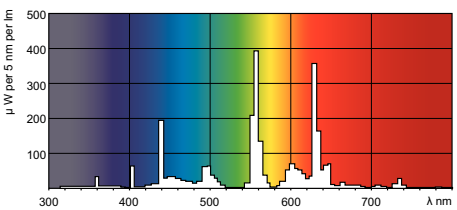

2015, December 28
data subject to change

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change